




# XCubeSAN Series Application Note

## Backup VM via Veeam Backup & Replication



QSAN Technology, Inc.  
[www.QSAN.com](http://www.QSAN.com)



## Copyright

© Copyright 2017 QSAN Technology, Inc. All rights reserved. No part of this document may be reproduced or transmitted without written permission from QSAN Technology, Inc.

December 2017

This edition applies to QSAN XCubeSAN series. QSAN believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

## Trademarks

QSAN, the QSAN logo, XCubeSAN, and QSAN.com are trademarks or registered trademarks of QSAN Technology, Inc.

Microsoft, Windows, Windows Server, and Hyper-V are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Linux is a trademark of Linus Torvalds in the United States and/or other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Mac and OS X are trademarks of Apple Inc., registered in the U.S. and other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

VMware, ESXi, and vSphere are registered trademarks or trademarks of VMware, Inc. in the United States and/or other countries.

Citrix and Xen are registered trademarks or trademarks of Citrix Systems, Inc. in the United States and/or other countries.

Veeam and Veeam Backup & Replication are trademarks of Veeam Software.

Other trademarks and trade names used in this document to refer to either the entities claiming the marks and names or their products are the property of their respective owners.

## Notices

---

This XCubeSAN series white paper is applicable to the following XCubeSAN models:

### XCubeSAN Storage System 4U & 6U Models

Model Name	Controller Type	Form Factor, Bay Count, and Rack Unit
XS5224D	Dual Controller	LFF 24-disk 4U Chassis
XS3224D	Dual Controller	LFF 24-disk 4U Chassis
XS3224S	Single Controller	LFF 24-disk 4U Chassis
XS1224D	Dual Controller	LFF 24-disk 4U Chassis
XS1224S	Single Controller	LFF 24-disk 4U Chassis

### XCubeSAN Storage System 3U 19" Rack Mount Models

Model Name	Controller Type	Form Factor, Bay Count, and Rack Unit
XS5216D	Dual Controller	LFF 16-disk 3U Chassis
XS3216D	Dual Controller	LFF 16-disk 3U Chassis
XS3216S	Single Controller	LFF 16-disk 3U Chassis
XS1216D	Dual Controller	LFF 16-disk 3U Chassis
XS1216S	Single Controller	LFF 16-disk 3U Chassis

### XCubeSAN Storage System 2U 19" Rack Mount Models

Model Name	Controller Type	Form Factor, Bay Count, and Rack Unit
XS5212D	Dual Controller	LFF 12-disk 2U Chassis
XS5212S	Single Controller	LFF 12-disk 2U Chassis
XS3212D	Dual Controller	LFF 12-disk 2U Chassis
XS3212S	Single Controller	LFF 12-disk 2U Chassis
XS1212D	Dual Controller	LFF 12-disk 2U Chassis
XS1212S	Single Controller	LFF 12-disk 2U Chassis
XS5226D	Dual Controller	SFF 26-disk 2U Chassis
XS5226S	Single Controller	SFF 26-disk 2U Chassis
XS3226D	Dual Controller	SFF 26-disk 2U Chassis
XS3226S	Single Controller	SFF 26-disk 2U Chassis
XS1226D	Dual Controller	SFF 26-disk 2U Chassis

XS1226S	Single Controller	SFF 26-disk 2U Chassis
---------	-------------------	------------------------

Information contained in document has been reviewed for accuracy. But it could include typographical errors or technical inaccuracies. Changes are made to the document periodically. These changes will be incorporated in new editions of the publication. QSAN may make improvements or changes in the products. All features, functionality, and product specifications are subject to change without prior notice or obligation. All statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products.

All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

# Table of Contents

---

Notices .....	i
Backup VM via Veeam Backup & Replication.....	1
Executive Summary.....	1
Audience .....	1
Best Storage Configuration .....	1
Network Configuration and Diagram.....	1
RAID Configuration .....	2
Server Configuration .....	3
Network Configuration .....	3
Veeam Installation and License Activation.....	3
Connecting to Hypervisor Server .....	5
Create Backup Job.....	8
Restore the Backup VM to Another Hypervisor Server .....	11
Conclusion .....	17
Apply To .....	17
Reference.....	18
Appendix.....	19
Related Documents.....	19
Technical Support .....	19



# Backup VM via Veeam Backup & Replication

---

## Executive Summary

Veeam Backup & Replication is a powerful, easy-to-use and affordable backup and availability solution. It provides fast, flexible and reliable recovery of virtualized applications and data, bringing VM (virtual machine) backup and replication together in a single software solution. Veeam Backup & Replication delivers award-winning support for VMware vSphere and Microsoft Hyper-V virtual environments. This application note provides technical guidance for backing up VM or its valuable data through Veeam Backup & Replication application along with QSAN XCubeSAN series product.

## Audience

This document is applicable for those technical members who are familiar with QSAN products, and for those who are good at network trouble shooting, Windows Server and Unix-Like OS operations, and basic hardware installations.

Please read this document carefully before trying to adjust any parameter on server side. Doing an adjustment with wrong understanding may lead you to get a worse performance experience than ever. If you have any questions about the adjustment, please consult QSAN Technical Support for further assistance.

## Best Storage Configuration

### Network Configuration and Diagram

We used a quite easy environment which is direct connections between a Windows Server and QSAN XCubeSAN s both controllers to demonstrate the operations with Veeam Backup & Replication application.

Controller 1									
	Location	Port Name	Status	LAG	VLAN ID	IP Address	Gateway	Jumbo Frame	MAC Address
▼	Onboard	LAN1 (10Gb)	1 Gb/s	N/A	N/A	10.10.1.101		Disabled	00:13:78:d4:02:2a
▼	Onboard	LAN2 (10Gb)	1 Gb/s	N/A	N/A	192.168.100.2		Disabled	00:13:78:d4:02:2b

Controller 2									
	Location	Port Name	Status	LAG	VLAN ID	IP Address	Gateway	Jumbo Frame	MAC Address
▼	Onboard	LAN1 (10Gb)	1 Gb/s	N/A	N/A	10.10.1.103		Disabled	00:13:78:d4:02:34
▼	Onboard	LAN2 (10Gb)	1 Gb/s	N/A	N/A			Disabled	00:13:78:d4:02:35

Figure 1 XCubeSAN Network Configuration

The network settings were quite simple as well.

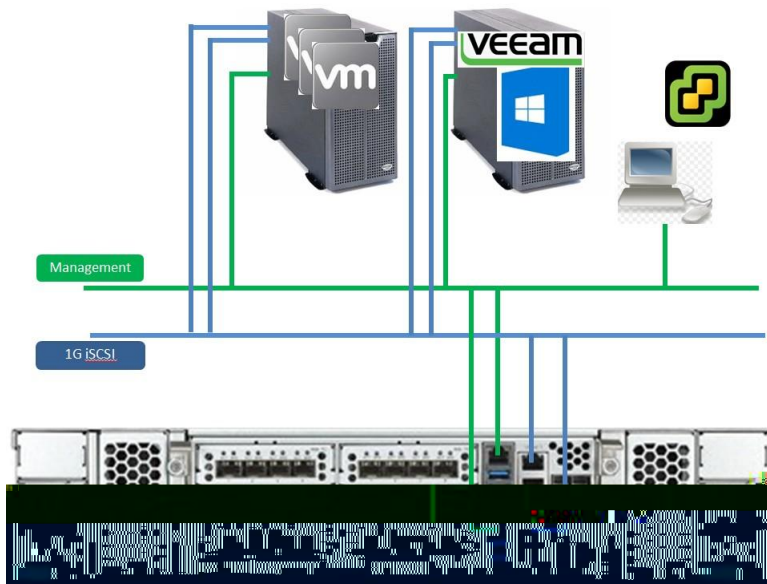


Figure 2 Network Diagram

## RAID Configuration

- Storage
  - Model: XCubeSAN XS5212D
  - Memory: 16GB (2 x 8GB in bank 1 & 3) per controller
  - Firmware 1.2.2
  - HDD: 12 x Seagate Constellation ES, ST500NM0001, 500GB, SAS 6Gb/s
  - HDD Pool: 1 x RAID 6 Pool with 12 x NL-SAS HDDs in Controller 1



- HDD Volume: 1 x 100GB in Pool
- LUN Mapping: iSCSI target0 LUN0



**INFORMATION:**

RAID configuration may vary depending on the real environment on field site, please create RAID pool and volume to be fitted for the environment.

## Server Configuration

### Network Configuration

Please make sure the connected ports which are used for iSCSI connections have been configured with the same IP segment as the XCubeSAN s controllers side, once the IPs could be pinged it shall be able to be logged in with iSCSI sessions.

As there were two iSCSI sessions in this case, enabling MPIO on the Windows Server side was necessary to make the multipath work.

### Veeam Installation and License Activation

Follow the installation wizard of Veeam application and it will guide you to go through and finish the installation step by step, please remember firstly to activate the license to get everything worked as expected.

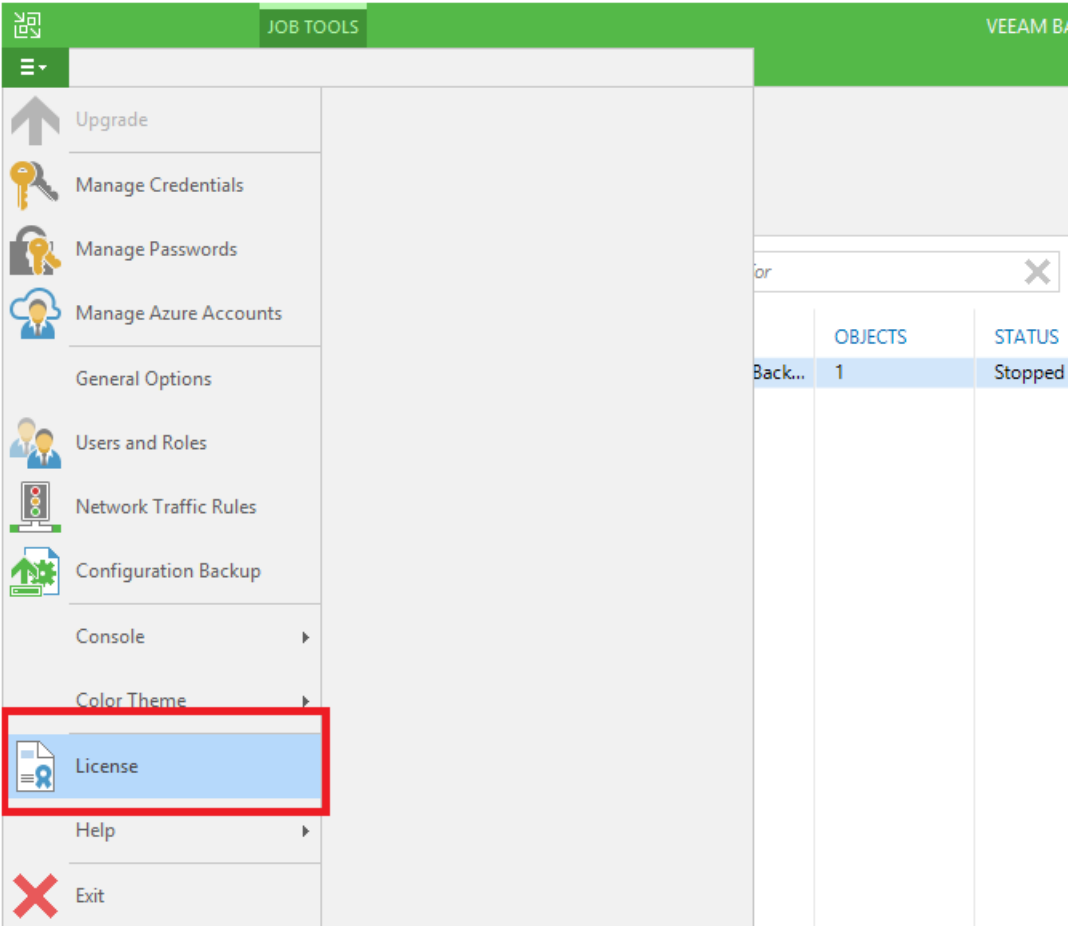


Figure 3 License Activation in Veeam

## Connecting to Hypervisor Server

1. Click the Add Server button on the left-corner on Veeam Backup & Replication application.

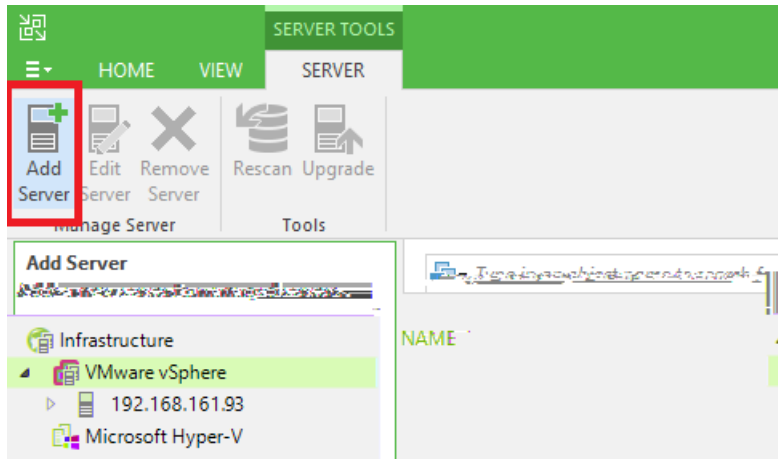


Figure 4 Add Server

2. Follow the Wizard to complete the process of adding a new Hypervisor Server.

Figure 5 Add Server Wizard Step 1

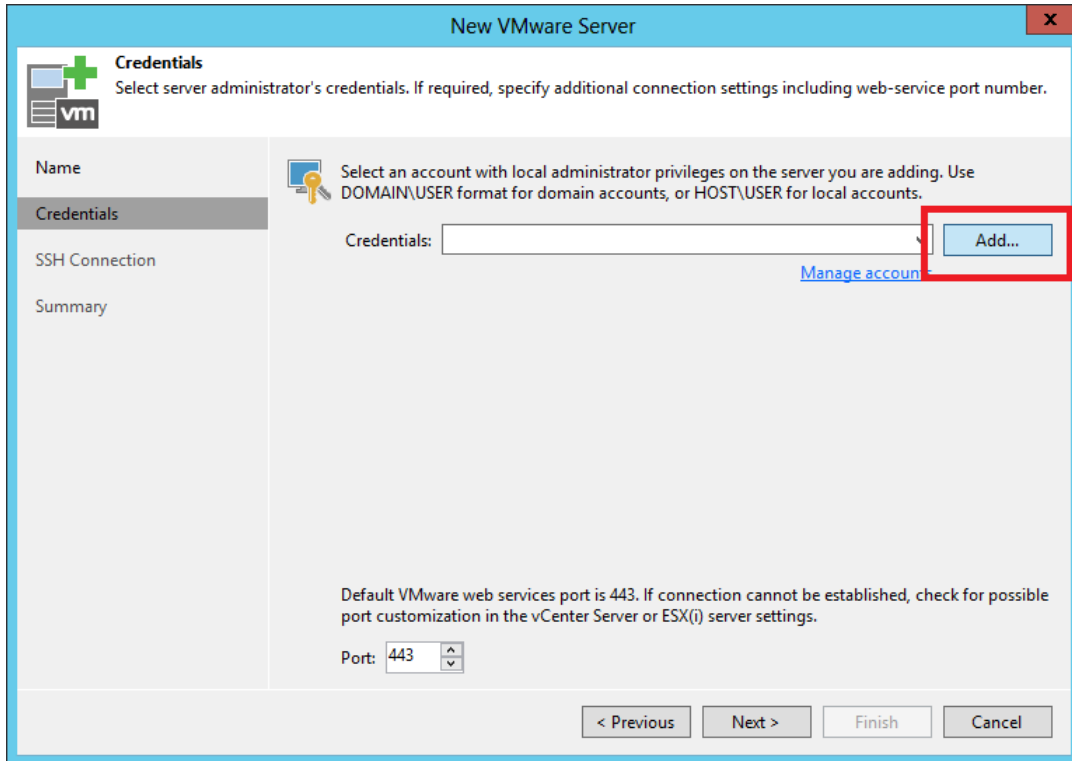


Figure 6 Add Server Wizard Step 2

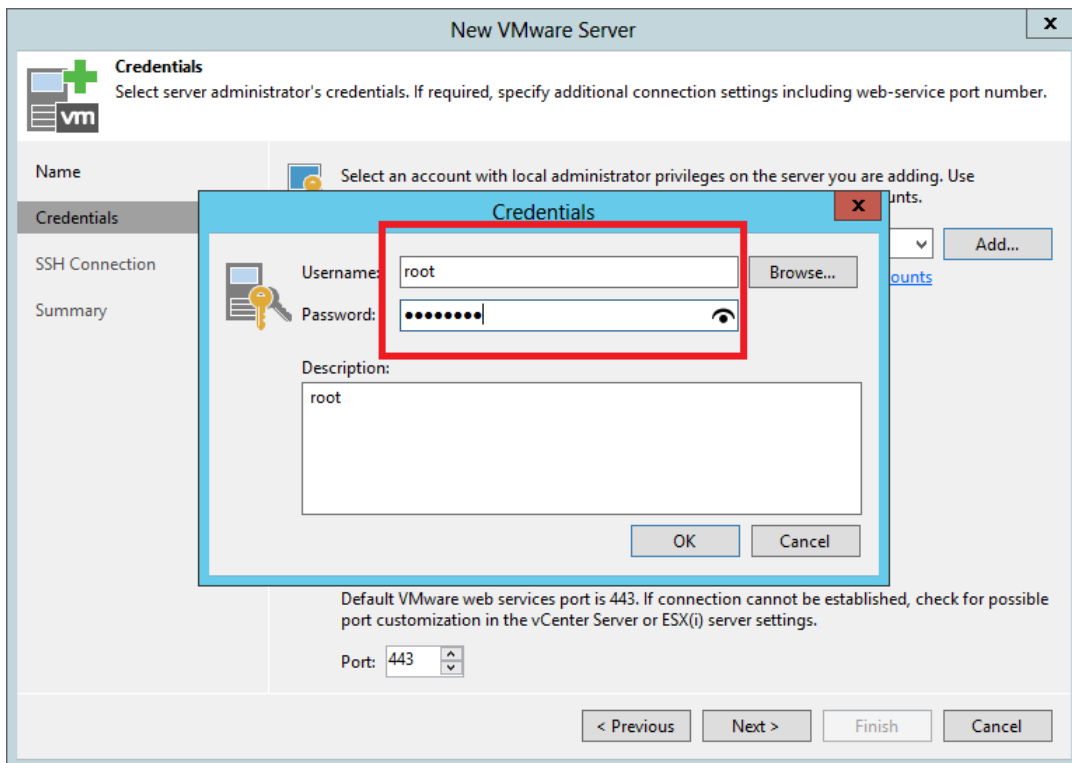


Figure 7 Add Server Wizard Step 3

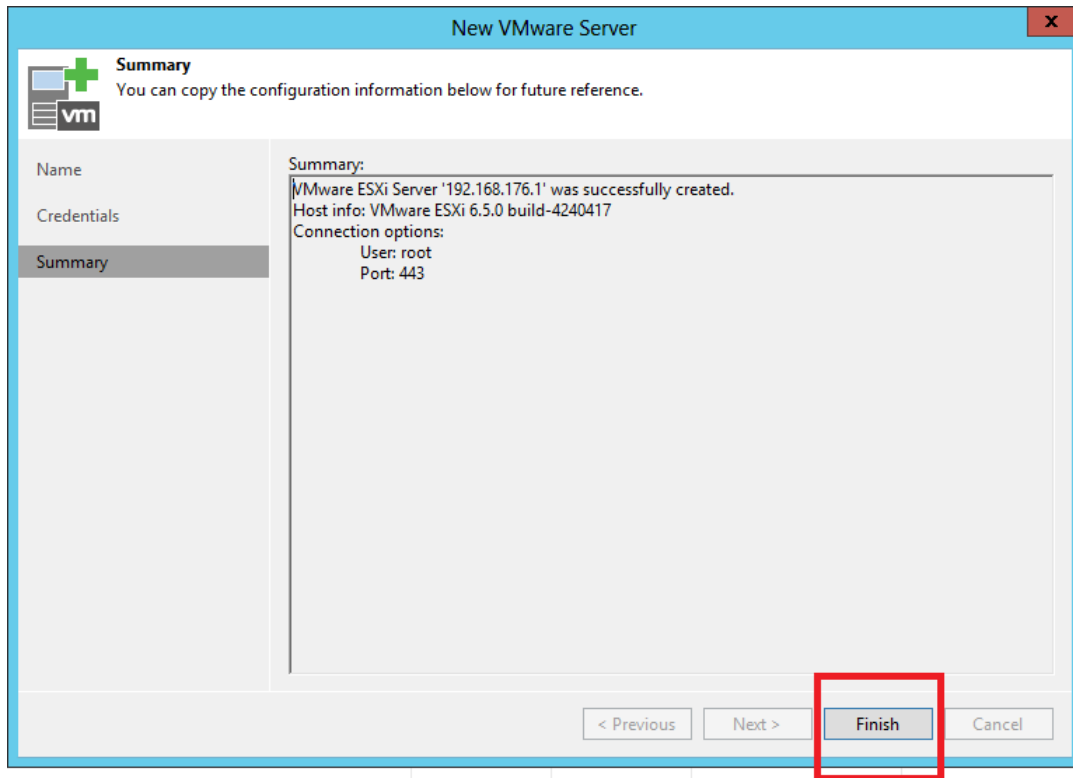


Figure 8 Add Server Wizard Step 4

3. A new server is created and is displayed in the left window.

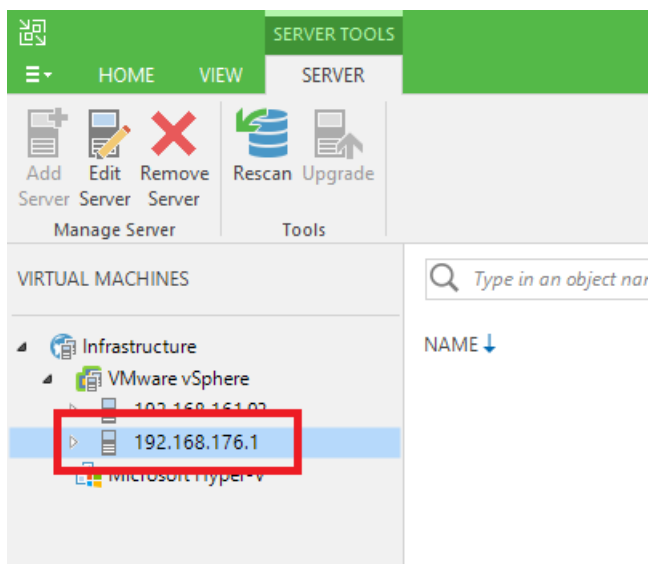


Figure 9 A New Server is Created

## Create Backup Job

1. In BACKUP & REPLICATION page, click the Backup Job button at the left-corner.

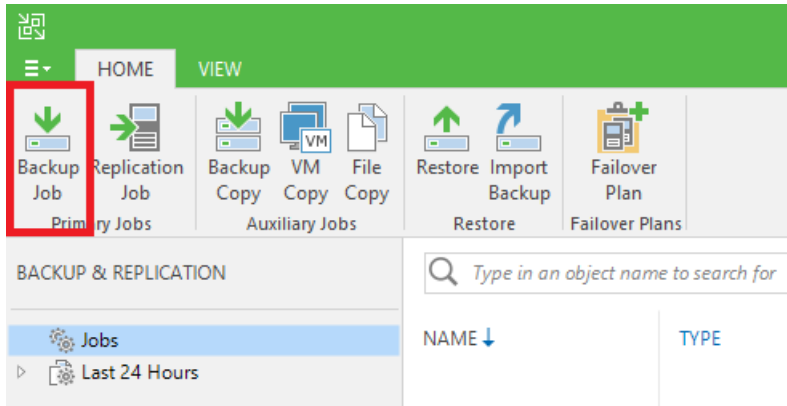


Figure 10 Create a Backup Job

2. Follow the wizard to finish the process.

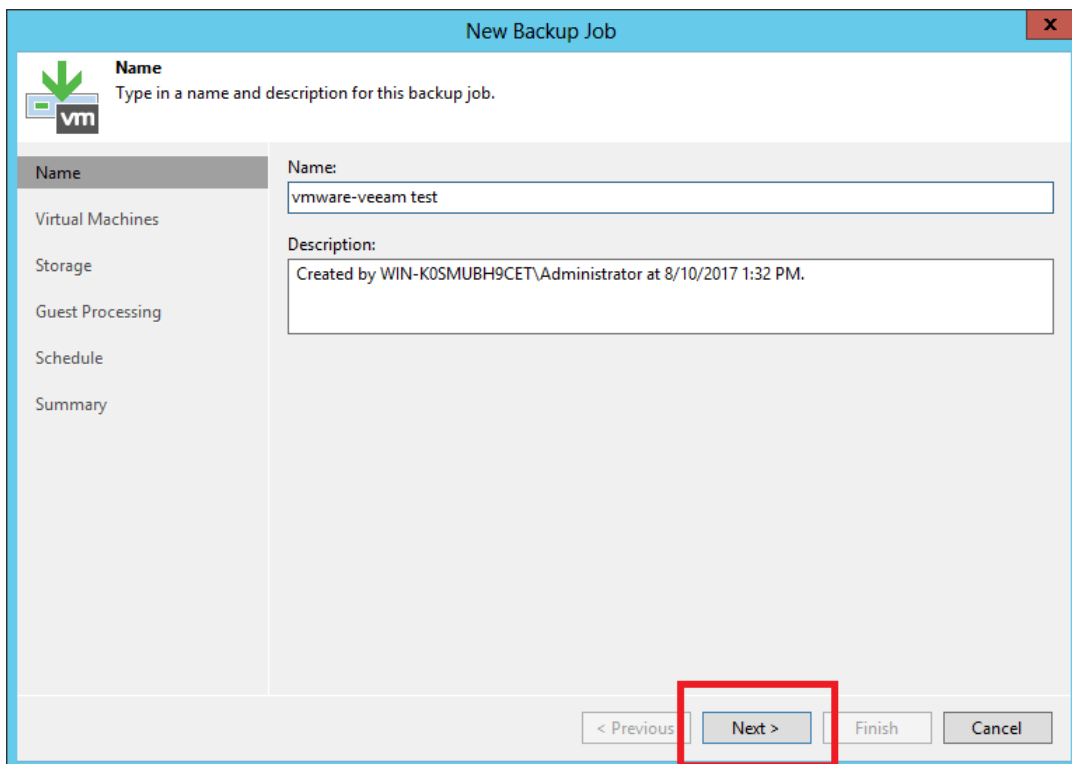


Figure 11 Create a Backup Job Step 1

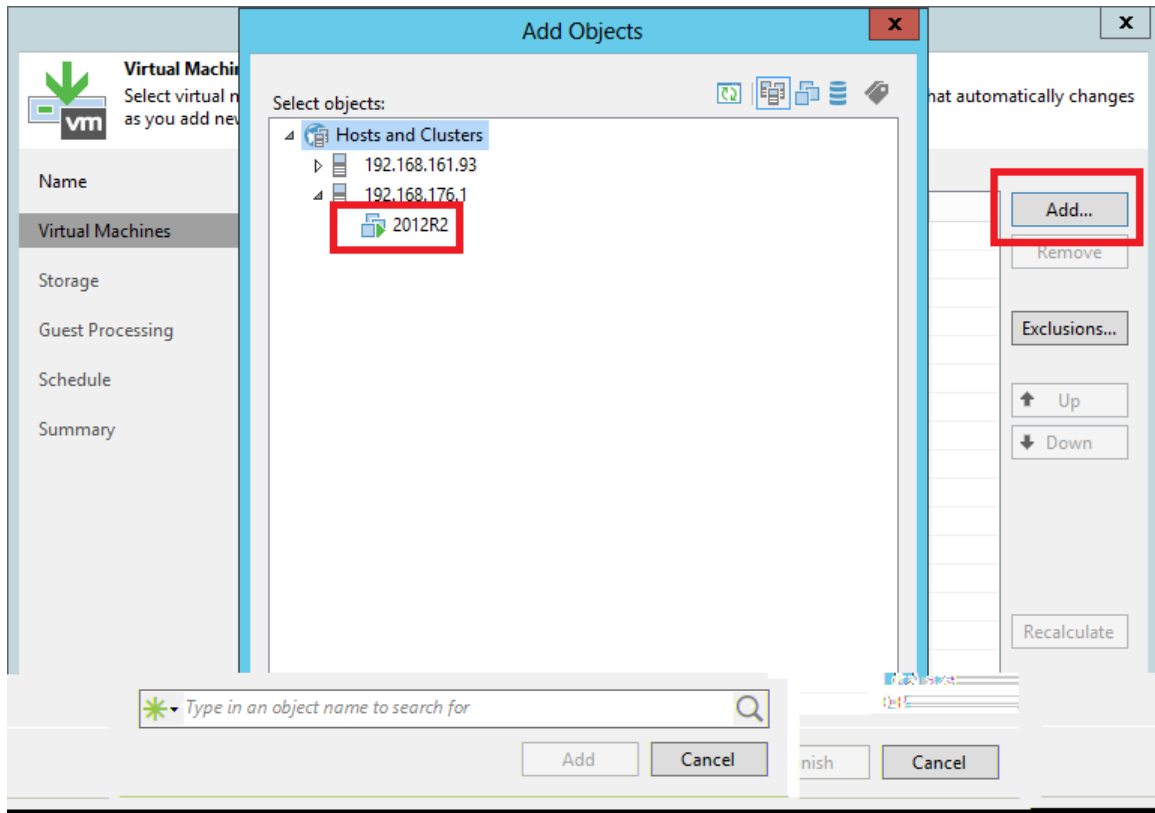


Figure 12 Create a Backup Job Step 2

TIP:

The storage could be specified according to customer s needs, XCubeSAN s iSCSI volume has been formatted as E: drive, so here we chose E: drive as the backup repository.





## Restore the Backup VM to Another Hypervisor Server

1. Click the Backups item, and select the drive you used to store the backup VM images.

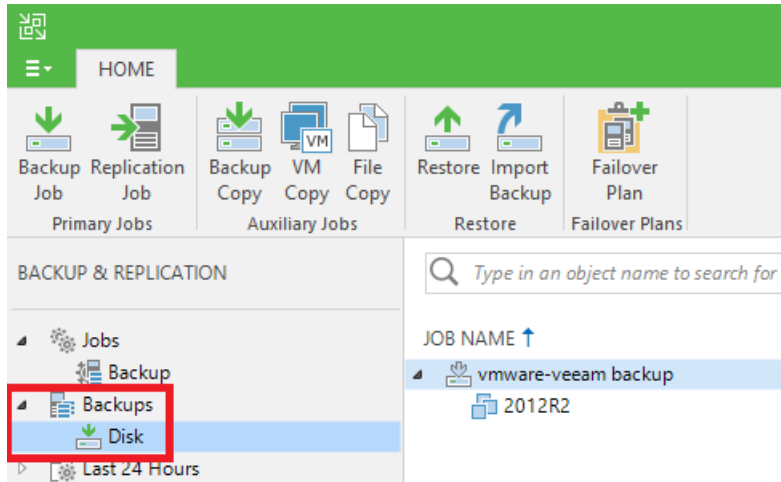


Figure 14 Restore the Backup VM Step 1

2. Select the backup image that you would like to restore and right-click it; choose the Restore entire VM... item.



Figure 15 Restore the Backup VM Step 2

3. Select below option at this step.

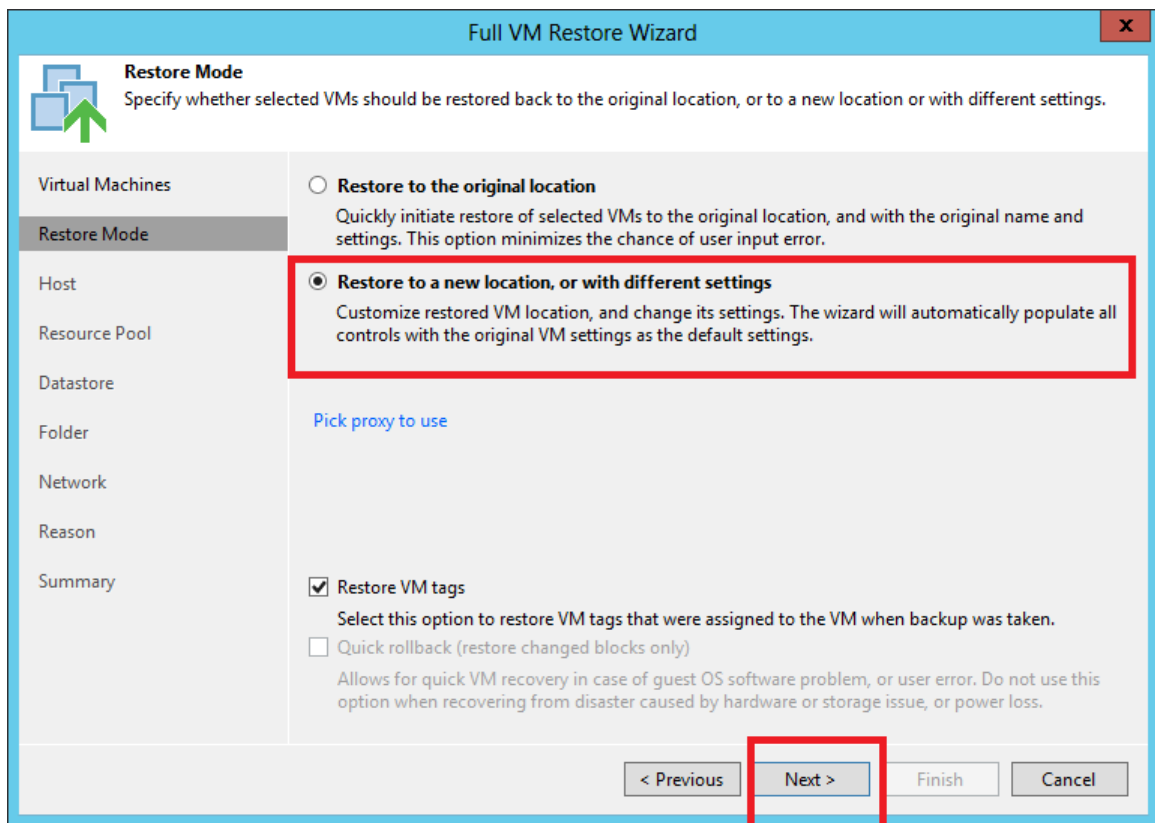


Figure 16 VM Restore Wizard Step 1

4. Choose the destination.

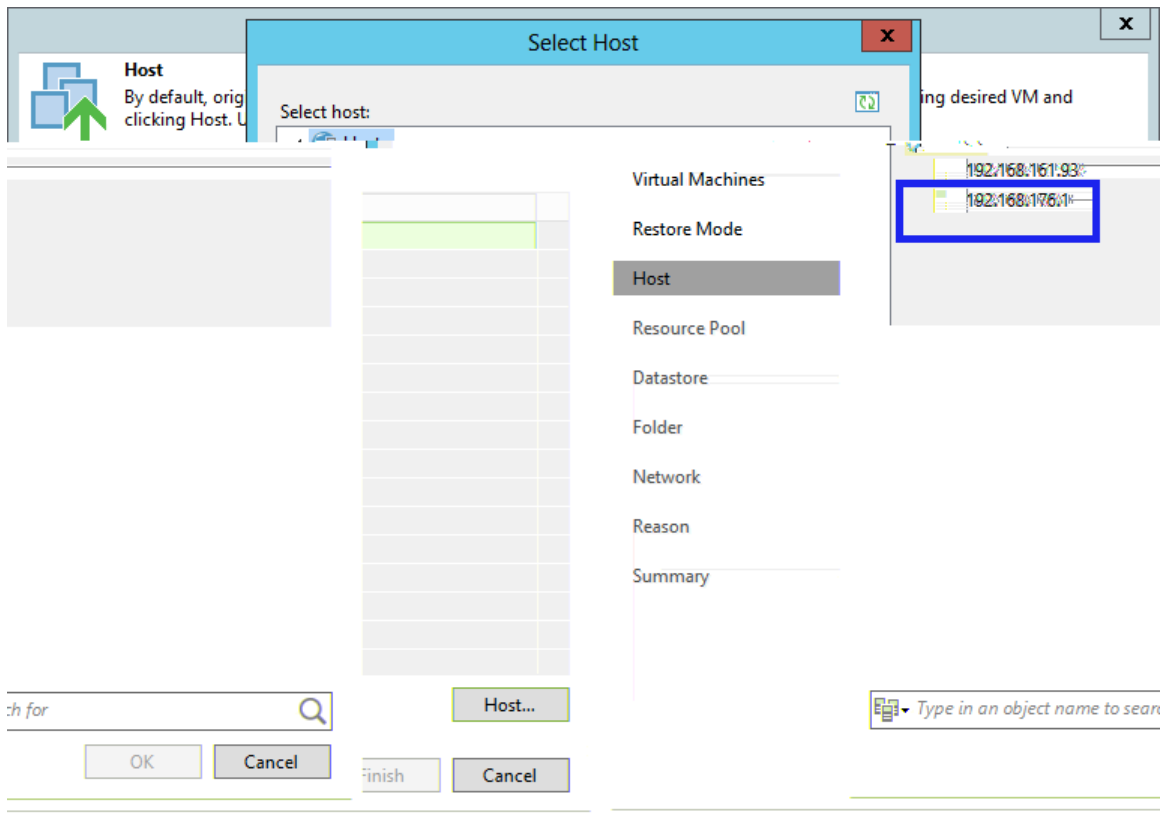


Figure 17 VM Restore Wizard Step 2



- Specify a name for the restoring image as the new VM s name.

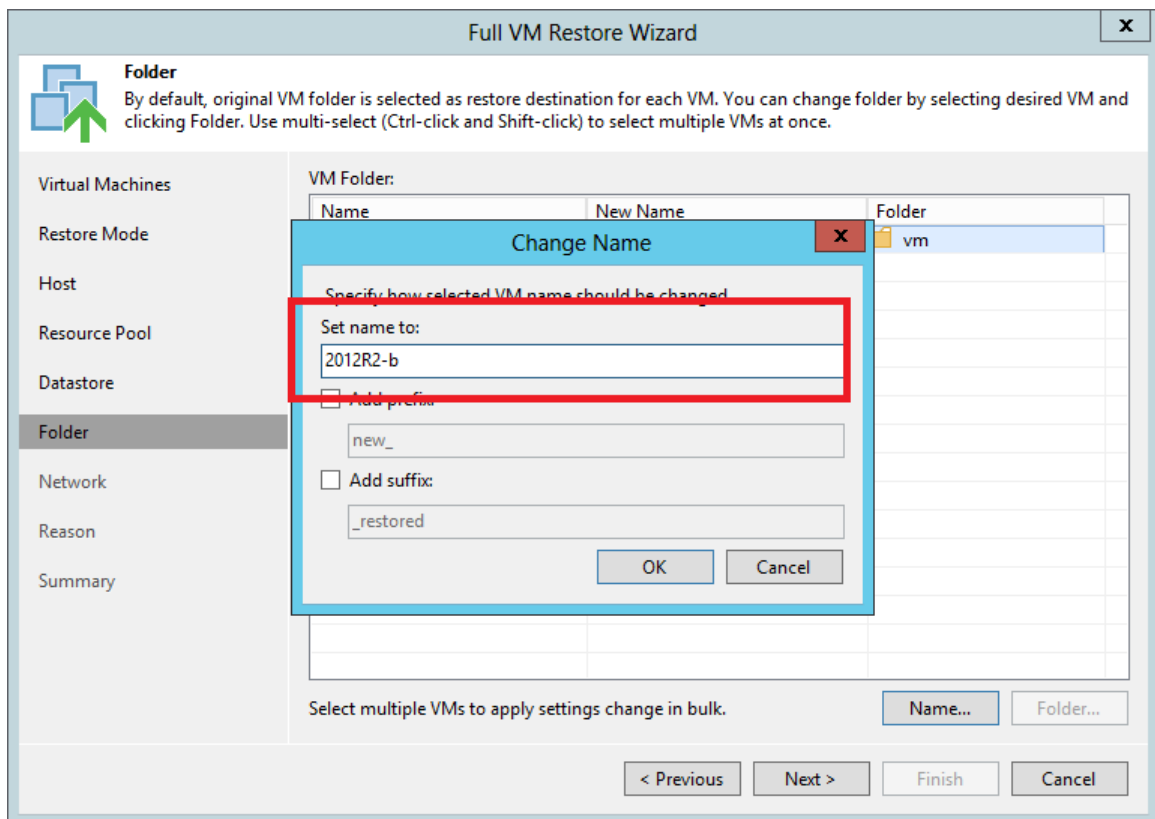


Figure 19 VM Restore Wizard Step 4

7. Wait for the restoring job to be finished.

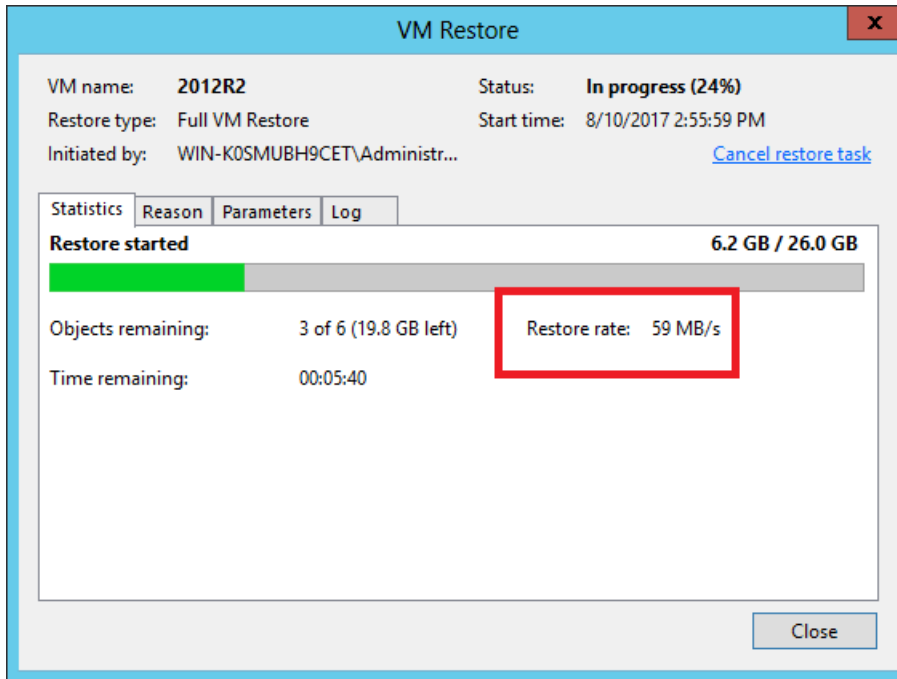


Figure 20 VM Restore Wizard Step 5

8. Check the restored files on the destination server.




Figure 21 Check the restored files

9. Remember to register the VM to the server.

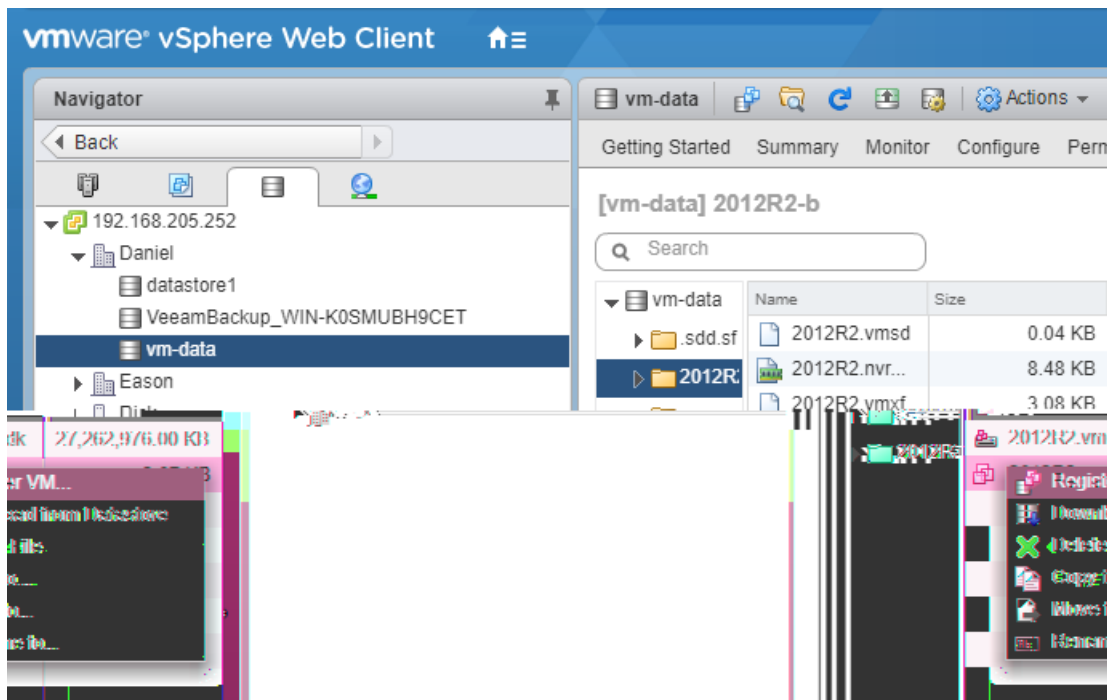


Figure 22 Register the VM

10. Done.

## Conclusion

Veeam Backup & Replication is a popular backup and availability solution. Readers can setup the software along with QSAN XCubeSAN series product easily via this application note.

## Apply To

- XCubeSAN XS5200 / XS3200 / XS1200 FW 1.2.2 and later





