

TYAN

Summer Addendum 2004

TYAN

www.tyan.com

Tyan Computer USA

3288 Laurelview Court
Fremont, CA 94538
USA
Tel: +1-510-651-8868
Pre-Sales Tel: +1-510-651-8868x5120
Fax: +1-510-651-7688
Email: sales_america@tyan.com

Tyan Computer Taiwan

7th Floor No. 187
Tiding Boulevard, Section 2
Nei-Hu, Taipei
Taiwan
Tel: +886-2-8751-2200
Fax: +886-2-8751-2211
Email: sales_asia@tyan.com

Tyan Computer Japan

WIZEM Bld. 6F 602
3-3-8, Ueno, Taitou-ku, Tokyo
110-0005 Japan
Tel: +81-3-3837-7580
Fax: +81-3-3837-7581
Email: tyan.jpn.inf2003@tyan.co.jp

Tyan Computer Germany

Cyclo Str. 45
85229 Markt Indersdorf
Germany
Tel: +49-8136-939530
Fax: +49-8136-939544
Email: contact@tyan.de
sales_europe@tyan.com

Tyan Computer UK

Newhouse, Popham Lane
North Waltham
Basingstoke
Hampshire

Power of 4

Intel® Xeon™ Platform Series

Power of 4

AMD Opteron™ Platform Series

▶ Server Motherboards


▶ Server Motherboards

4-Way



Thunder
GC-HE-Pro

S4521

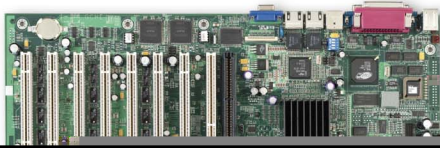

4-Way



Thunder
K8QS-Pro

S4882UG2NR







▶ Server Mot



AMD **Opteron**[™]
series


▶ Workstati



Intel® **Xeon**[™] Platform
series




Thunder



Thunder

Intel® Pentium™ 4 Platform series



Tomcat
i925X
S5130ANRF

Barebones series

Transport
GS12
B5103G12S2



Model Number	Transprot GS12
Part Number	B5103G12S2

Barebones

series

AMD VALIDATED

Transport GX28 B2881G28S4H



Model Number	Transport GX28
Part Number	B2881G28S4H
Enclosure Form Factor	1U (26" in depth)
Supported CPU	Up to two AMD Opteron™ 200 series
Chipset	AMD-8131™/AMD-8111™
DIMM number	8
Memory Type (max. capacity)	ECC, registered, DDR400/333/266 (16GB)
Storage controller	Silicon Image Si3114 SATA RAID
RAID support	0, 1, 10
HDD bays	4, external access, hot-swappable
Multimedia drive	Slim CD-ROM
Networking	2*Gigabit
PCI/PCI-X slots	2 (64-bit, 100/133MHz)
Power supply	400W, with PFC
OEM-only SKU	B2881G28U4H: Support 4 hot-swappable Ultra320 SCSI HDD with ZCR

AMD VALIDATED

Transport TA26 B2882T26U8H



Model Number	Transport TA26
Part Number	B2882T26U8H
Enclosure Form Factor	2U (26" in depth)
Supported CPU	Upto to two AMD Opteron™ 200 series
Chipset	AMD-8131™/AMD-8111™
DIMM number	8
Memory Type (max. capacity)	ECC, registered, DDR400/333/266 (16GB)
Storage controller	Adapter AJC 7002 Ultra320 SCSI
RAID support	Optional ZCR
HDD bays	8, external access, hot-swappable
Multimedia drive	Slim CD-ROM
Networking	2*Gigabit + 1*10/100base-T
PCI/PCI-X slots	3(64-bit, 133/100/66MHz)
Power supply	460W, with PFC

Transport
GX28



Transport
TA26

