

VessJBOD™ 1000 Series



●●●●● Dual SAS-to-SAS/SATA 3Gb/s Storage Enclosure

Amazing Lightweight and Space-Saving Architecture


Innovative enclosure design makes the VessJBOD™ 1000 series easy to lift and install into rackmount housings, especially for SMBs who are short of space. As IT data centers face pressing challenges with the obvious growth of digital information, demanding storage requirements with more cooling and floor space. Making an efficient layout deployment is not just reducing square footage in an electrical or computer room, but also saving money from your IT budget.

Energy Efficiency Means Savings Effectiveness

VessJBOD™ 1000 uses 80 PLUS Certified¹ power supplies. 80 PLUS means an 80% above energy-efficient program in power supply design. 80 PLUS qualified power supplies not only lower power costs and reduce current draw for a significant improvement of power quality, but also come with value-added non-energy benefits such as reductions of heat output, maintenance costs, and total cost of ownership as a better system reliability environment.

Your Comprehensive Storage Partner


PROMISE storage solutions comprise various combinations of host bus adapter, Vess system and enclosure series connections. A VessRAID™ storage system can be direct attached with the FastTrak™ TX8668² adapter as host channel, and downlinks secondary VessJBOD™ expansion enclosures up to 80TB. A VessJBOD™ enclosure supports IOP based RAID adapters like SuperTrak™ EX8654, SuperTrak™ EX8658, and SuperTrak™ TX8658 as a massive disk storage pool.




VessJBOD Enclosure Highlights

- 16/12 hot-swappable drive bays in a robust 3U/2U chassis
- Supports Serial Attached SCSI (SAS) and SATA drives
- Single SAS JBOD I/O module
- Single or Dual hot-swap redundant power supply unit with 80PLUS Certified
- SES-2 compliant enclosure management
- Fully compatible with PROMISE HBAs and RAID subsystems

Quick Selection A

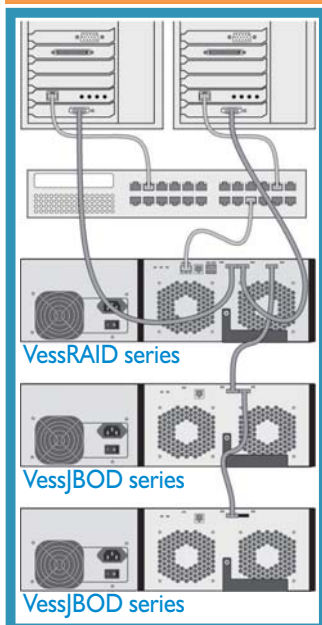

Quick Selection B,C,D

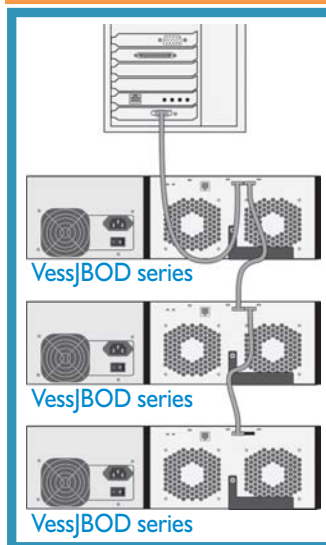

Quick Selection Guide

	HBA	System
A	FastTrak TX8668	VessRAID series
B	SuperTrak EX8654	VessJBOD series
C	SuperTrak EX8658	VessJBOD series
D	SuperTrak TX8658	VessJBOD series



¹Single PSU is 80 PLUS Bronze Certified, Redundant PSUs have 80 PLUS power efficiency

²FastTrak TX8668, Low Profile PCIe4 SAS/SATA RAID HBA with 8 external ports will be available in Q2, 2009

VessJBOD™ 1000 Serie Specifications

VessJBOD System	VessJBOD 1730 ¹	VessJBOD 1740	VessJBOD 1830 ¹	VessJBOD 1840
JBOD I/O Module Features				
Form Factor	2U	3U	2U	3U
Drive Support	12 Drives (3.5") SAS(3Gb/s), SATAII(3Gb/s)	16 Drives (3.5")	12 Drives (3.5")	16 Drives (3.5")
Controller	Single			
Host Channel	Dual, IN/OUT SAS-wide(x4) port over SFF-8088			
Host Options				
Promise RAID HBA	SuperTrak™ EX8654, SuperTrak™ EX8658, SuperTrak™ TX8658			
Promise RAID Storage System	VessRAID 1000 iSCSI/SAS Series			
SAS Features				
Management Function	Easy FRU Design Full SAS domain Topology Management SAS Management Protocol In-band Access to Expander and PHY Statistic Counters and Performance Monitors SES Enclosure Management SCSI SES Command Set over Virtual SSP Device			
System Management				
Supported OS	Windows 2000, XP, 2003, Vista, 2008 Red-Hat Linux SuSE Linux Novell Netware 6.5 SP6 FreeBSD 7.0 Solaris 10 Update5 Mac OS X 10.5			
Management Interfaces	LED Status Indicator In-band SES Enclosure Management CLI via RJ-11 serial port			
Management Protocols	SES over in-band SAS			
System Information				
AC Input	90 ~ 264 VAC, 47 ~ 63Hz			
Current (Maximum)	6A (100V); 3A (240V)	7A (100V); 3.5A (240V)	6A (100V); 3A (240V)	7A (100V); 3.5A (240V)
Power Supply	Single 350W 90-264V auto-ranging w/PFC 80PLUS Bronze Certified	Single 450W 90-264V auto-ranging w/PFC 80PLUS Bronze Certified	Dual 350W 90-264V auto-ranging w/PFC 80PLUS Power Efficiency Hot swappable and redundant	Dual 450W 90-264V auto-ranging w/PFC 80PLUS Power Efficiency Hot swappable and redundant
Temperature	5° ~ 40°C ² (-40° ~ 60°C non operational)			
Relative Humidity	10% to 80% non-condensing			
Dimensions (H x W x D)	88.4 x 446.2 x 460.5 mm 3.5 x 17.6 x 18.1 in	131 x 446.2 x 460.5 mm 5.1 x 17.6 x 18.1 in	88.4 x 446.2 x 460.5 mm 3.5 x 17.6 x 18.1 in	131 x 446.2 x 460.5 mm 5.1 x 17.6 x 18.1 in
Weight	TBD	10.8 kg (23.81 lbs) w/o drives 20.4 kg (44.97 lbs) w/ drives	TBD	13 kg (28.66 lbs) w/o drives 22.6 kg (49.82 lbs) w/ drives
Safety/EMI	CE, FCC Class B, VCCI, BSMI, CB, KCC, C-Tick, UL, TUV			
Base Configuration	VessJBOD 2U/3U Unit w/ Drive Carrier RJ11-to-DB9 Serial Data Cable, Power Cord (Single PSU: 1; Dual PSU: 2) Quick Start Guide, Set of Screws, CD (Product Manual, QSG)			
Warranty and Option				
Warranty	3 years limited warranty ³			
Supported Hardware Options	Front Bezel, Sliding Rail, SAS Cable			

¹VessJBOD 2U units will be available in Q2, 2009

²Operational Temperature between 5° ~ 35°C if BBU installed

³BBU and FAN are covered by 2 years limited warranty

©2009 Promise Technology, Inc. Specifications subject to change without notice.

200902013

:: Promise USA

Milpitas, USA
Tel: +1 408 228 1400
E-mail: sales@promise.com

:: Promise Germany

Dortmund, Germany
Tel: +49 0 2 31 56 76 48 0
E-mail: sales-de@promise-emea.com

:: Promise UK

Wokingham, United Kingdom
Tel: +44 0 870 112 59 77
E-mail: sales@promise-emea.com

:: Promise China

Beijing, China/Shanghai, China
Tel: +86 10 8857 8085/8095(Beijing)
Tel: +86 21 6249 4192/93/99(Shanghai)
E-mail: sales@promisechina.com

:: Promise EMEA

Son, The Netherlands
Tel: +31 0 40 235 2600
E-mail: sales@promise-emea.com

:: Promise Italy

Rome, Italy
Tel: +39 0 6 367 126 26
E-mail: sales-it@promise-emea.com

:: Promise Taiwan

Hsin-Chu, Taiwan
Tel: +886 3 578 2395
E-mail: sales@promise.com.tw

:: Promise Japan

Tokyo, Japan
Tel: +81 3 5333 3631
E-mail: sales-jp@promise.com.tw