



# Supermicro Server Management Utilities

SSM | SPM | SUM | SuperDoctor® 5 | IPMI Utilities



*Optimized for Data Centers*



- Remotely manage servers deployed worldwide
- Manage hardware with no impact on applications
- Integrate utilities easily with existing infrastructure

## Key Features:

- **Remotely manage servers deployed worldwide**  
Manage server health, power consumption and firmware maintenance remotely using agent and agent-less mechanisms.
- **Manage hardware with no impact on applications**  
Perform monitoring, configuration and update operations without affecting application performance or continuity using out-of-band (OOB) utilities.
- **Integrate utilities easily with existing infrastructure**  
Server management functions can be called through utilities' command line interfaces to support existing data center automated management frameworks. Additionally, our server management utilities provide seamless integration with Nagios and other industry standard plugins.

## SUM: Supermicro Update Manager

Supermicro® Update Manager remotely updates the BIOS and BMC/IPMI firmware, as well as, system settings of Supermicro X9 (Romley) and X10 generation based machine through in-band and OOB (Out-Of-Band) communication channels, i.e., communication through the BMC/IPMI interface. Users can locally or remotely edit system BIOS and BMC/IPMI settings from a human-readable text file, and use this utility to update the target machine's system BIOS and BMC/IPMI configuration. Firmware updates and setting operations is independent of operating environment on target machine and can be executed before system OS/hypervisor is installed.

### Environment Requirements

#### Hardware:

- 50 MB free disk space
- 128 MB available RAM
- Ethernet network interface card

#### Operating System:

- Linux: Red Hat Enterprise Linux Server 5 Update 0 (x86\_64) or later
- Windows: Windows Server 2008 (x86\_64) or later
- JAVA Runtime Environment:
- OPEN JDK / Oracle JRE 1.6.0 or later

### Firmware Requirements

#### BMC Version:

- X9 ATEN platform (SMT\_X9) : 3.14 or later
- X10 ATEN platform (SMT\_X10): 1.52 or later
- X9 AMI platform (SMM\_X9): 2.32 or later


#### BIOS Version:

- Version 2.0 or later for select X9 Romley and X10 Denlow systems
- Version 1.0 or later for select X10 Grantley systems

SUM Feature List
<b>Product Key Management</b> <ul style="list-style-type: none"> <li>• Activate Product Key</li> </ul>
<b>System Checks</b> <ul style="list-style-type: none"> <li>• OOB/In-band Support</li> <li>• Asset Information (X10 Only)</li> <li>• System Utilization (X10 Only)</li> <li>• Sensor Data (X10 Only)</li> </ul>
<b>BIOS Management</b> <ul style="list-style-type: none"> <li>• Get BIOS Info</li> <li>• Update BIOS FW</li> <li>• Get/Set Default and</li> <li>• Get/Set DMI Information</li> <li>• Current BIOS Settings</li> </ul>
<b>BMC Management</b> <ul style="list-style-type: none"> <li>• Get BMC Info</li> <li>• Update BMC FW</li> <li>• Get/Set BMC Settings</li> <li>• System Event Log</li> <li>• Get/Clear Event Log (X10 Only)</li> </ul>
<b>Applications</b> <ul style="list-style-type: none"> <li>• TPM Provisioning (X10 Only)</li> <li>• Mount and Unmount Bootable ISO Image</li> <li>• Support for Driverless In-Band FW Updates</li> <li>• (Check for BIOS support)</li> <li>• Execute Parallel Updates from Centralized Management Server</li> </ul>

## SPM: Supermicro Power Manager

Supermicro Power Manager leverages Supermicro® IPMI interface and Intel Node Manager Technology to monitor CPU/Memory/System power usage, and remotely control power consumption. It can control power consumption of whole system by policy-based. Administrator can configure policies by data center, room, row, rack, target machine, or logical group defined by self. The policy can be triggered by condition of power or temperature threshold. And you can schedule the policies by time of day and/or day of week.

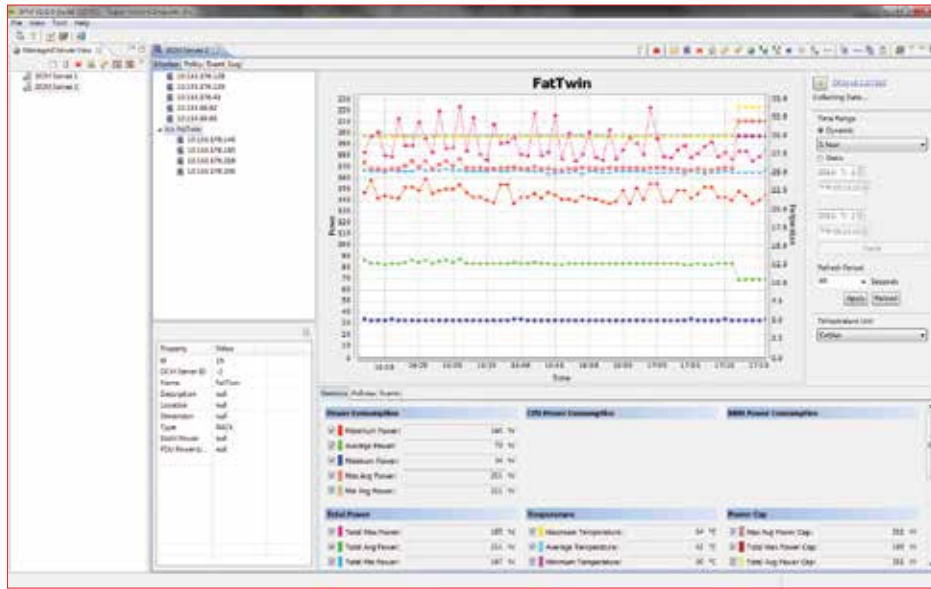

### SPM Feature List

#### Monitor and Control functions

- Power (system, CPU, memory, PDUs), temperature, P-States, T-States

#### Configurations

- Power capping limits
- Temperature limits ( Celsius/Fahrenheit)
- Refresh periods
- Custom events

#### Statistics

- Saves historical data up to 1 year
- Max, min, average

#### Notifications

- SNMP traps
- SMTP messages

#### Based on Intel Data Center Management software

- Monitor up to 5000 nodes with single DCM instance

### SPM Environment Requirements

#### Hardware:

- 50 MB free disk space
- 1024 MB available RAM

#### Operating System:

- Red Hat Enterprise Linux Server 6.x
- SUSE Linux Enterprise Server 11.x
- Fedora Core 15
- CentOS 5.x
- Ubuntu 11.x
- Windows Server 2003 / 2003 R2 / 2008 / 2008 R2
- Windows 7 / XP

#### JAVA:

- JRE 1.6.0 or above

### DCM Environment Requirements

#### Hardware:

- A dual-core processor of 2.6 GHz or higher
- 4 GB available RAM
- 60 GB free disk space

#### Operating System:


- Windows Server 2003 R2 / 2008 / 2008 R2
- Red Hat Enterprise Linux Server 5.x / 6.x
- SUSE Linux Enterprise Server 10.x / 11.X

#### JAVA:

- JRE 1.6.0 or above

## SSM: Supermicro Server Manager

Supermicro Server Manager monitors and manages a wide portfolio across multiple generations of Supermicro servers within a single console. SSM provides capabilities to monitor the health of server components including memory, hard drives and RAID controllers. It enables the datacenter administrator to monitor and manage power usage across all Supermicro servers allowing users to maximize their CPU payload while mitigating the risk of tripped circuit. Firmware upgrades on Supermicro servers became easier now with a couple of clicks. Administrators can now mount an ISO image on multiple servers and reboot the servers with those images. The tool also provides pre-defined reports and many more features that will make managing Supermicro servers simpler.

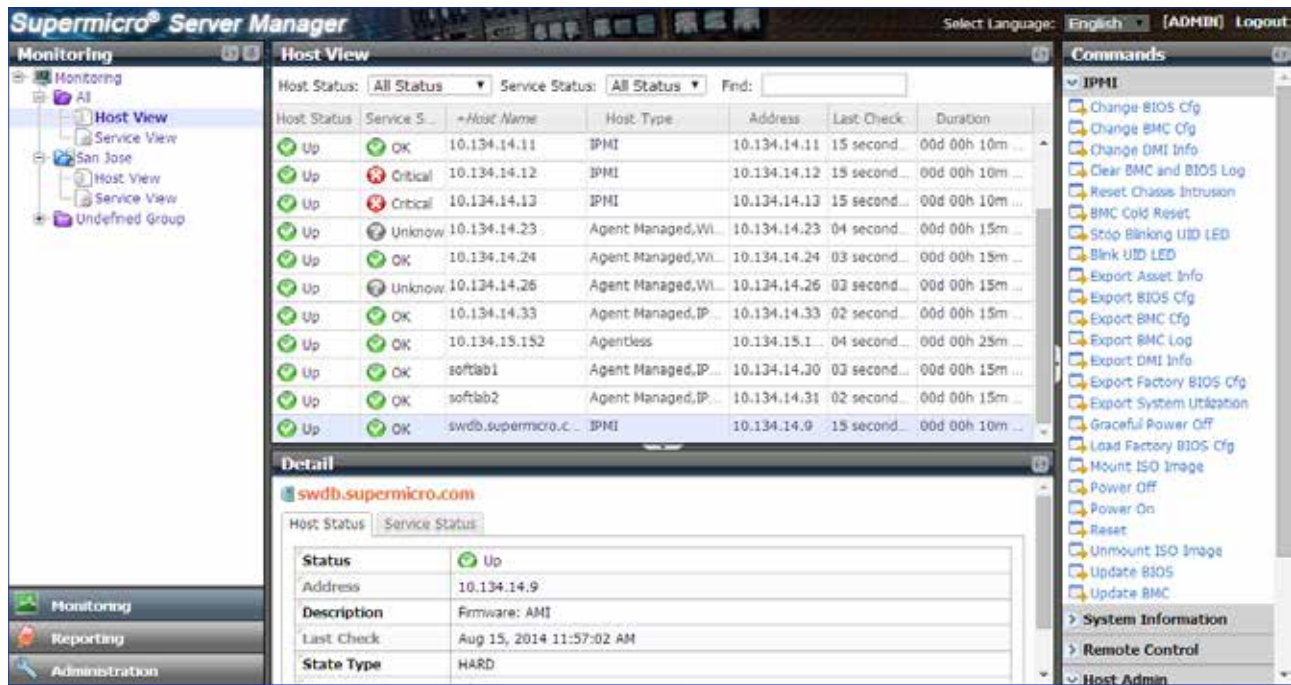

Screenshot of SSM Console

### BENEFITS

- Easy to use console reduces deployment time of Supermicro servers to hours
- Upgrade and Configuration commands on multiple machines in parallel exponentially reduces hardware maintenance time
- Single tool installation and single console to harness the advantages of multiple features
- REST APIs, CLI, and WebUI provides options to integrate Supermicro server management in existing framework
- Support for open source Nagios Plugins leverages existing work from the community


## Common Use Cases Scenarios

### Integrate Supermicro Server Manager in existing Datacenter infrastructure framework with REST APIs




### Upgrade BIOS on server clusters in less than 10 minutes\*

\* Depends on remote machines CPU, memory and network speeds

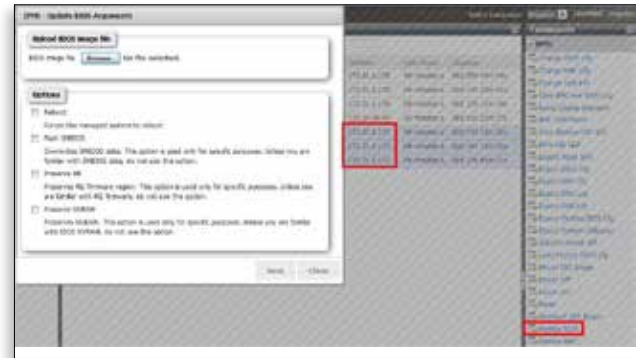

### Optimize power consumption in datacenter operations with custom policies

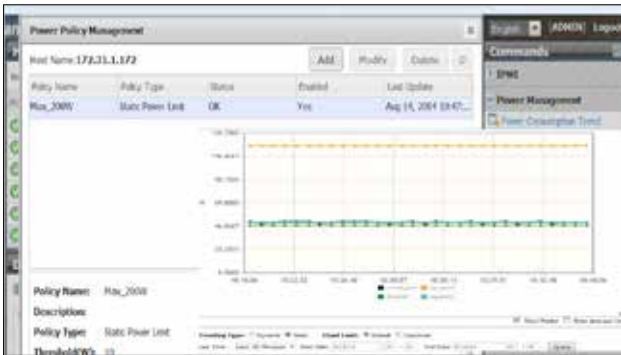

### Generate history reports to understand server's health helping administrators take pro-active steps to mitigate business impact

Host Name	Server Name	Health Date	Status	State Type	Alerted	Station Information
172.21.40.43	SPM Health A1	Aug 15, 2014 6:43:38 AM	OK	WARD	2/3	Checked (1, OK(1), OK(1)) Critical Error POC (Not-Red)
172.21.40.49	SPM Health A1	Aug 14, 2014 6:48:42 AM	OK	SDPT	3/3	Checked (1, OK(1), OK(1)) Critical Error POC (Not-Red)
172.21.40.49	SPM Health A1	Aug 14, 2014 6:48:48 AM	OK	WARD	2/3	Checked (1, OK(1))
172.21.40.49	SPM Health A1	Aug 14, 2014 6:48:51 AM	OK	SDPT	3/3	Checked (1, OK(1), OK(1)) Critical Error POC (Not-Red)
172.21.40.43	SPM Health A1	Aug 14, 2014 6:50:36 AM	OK	WARD	2/3	Did not have SPM installed
172.21.40.49	SPM Health A1	Aug 14, 2014 6:52:01 AM	OK	WARD	2/3	Checked (1, OK(1))
172.21.40.49	SPM Health A1	Aug 14, 2014 6:56:51 AM	Warning	SDPT	3/3	No error data
172.21.40.49	SPM Health A1	Aug 14, 2014 6:56:43 AM	OK	SDPT	2/3	Checked (1, OK(1), OK(1)) Critical Error (Class: Not-Red)
172.21.40.43	SPM Health A1	Aug 14, 2014 6:56:39 AM	OK	WARD	2/3	Checked (1, OK(1), OK(1)) Critical Error (Class: Not-Red)
172.21.40.43	SPM Health A1	Aug 15, 2014 6:56:15 AM	Down	SDPT	3/3	Did not have SPM installed

### SSM Feature List

- Monitor Server hardware and service health. Upgrade Server BIOS and IPMI firmware and configurations
- Groups together server clusters spread across different networks and manage remotely
- Check Asset information [SD5 should be installed (for X9)]
- Check System utilization through IPMI (Only available on X10)
- Mount bootable iso image to install operating systems
- Flexibility to monitor and manage power on a node or in a rack across your datacenter with configurable policies
- Remote console to target machines through VNC
- Log and Report the server information and availability
- Update SuperDoctor5 on target systems
- Administer E-mail alerts through SMTP protocol
- REST APIs allows integration with existing management tools

### SSM Environment Requirements

#### Hardware:

- X86 Server, 200 MB free disk space, 64 MB available RAM, Ethernet network interface

#### Operating System:

- Red Hat Enterprise Linux Server 5.x 64-bit, Red Hat Enterprise Linux Server 6.x 64-bit, SUSE Linux Enterprise 11.x 64-bit, Windows 2003 Server R2 64-bit, Windows 2008 Server R2 64-bit

#### Browser:

- OPEN JDK / Oracle JRE 1.6.0 or later

#### Firmware Requirements:

- Internet Explorer 8.x or higher, Firefox 3.x or higher
- Screen Resolution: 1024 x 768

## SD5: Supermicro SuperDoctor® 5

Supermicro SuperDoctor® 5 (SD5) utility monitors the system health of hardware and operating system services from the target nodes in real-time and provides alerts to administrators on the availability of systems in datacenters. The 5th generation version builds on top of SDII and SDIII, which have been supporting customers across the globe for the last 15 years and provides support for industry standard Nagios monitoring frameworks.



### SD5 Feature List

#### Monitoring Functions

- Hardware Monitoring (fan speed, temperature, voltage, chassis intrusion, redundant power failure, power consumption, disk health, and memory health)
- Software Monitoring (HTTP, FTP, and SMTP services)

#### Notification Functions

- Notifications Sent When Host or Service State Changes
- Notifications Sent via E-mail and SNMP Traps

#### Configuration Functions

- Monitored Items
- Alert Functions
- Password Settings

#### System Information and Report Functions

- 15 System Information Types (baseboard, services, etc.)
- Report Types (Supermicro SuperDoctor® 5 (SD5) Server Availability, Host Status Change, and Service Status Change)

## IPMI Utilities

Supermicro's IPMI utilities monitor and configure information related to the Baseboard Management Controller (BMC). Some commonly used utilities are highlighted below.

### IPMICFG - BMC/FRU Configuration Utility

#### IPMICFG Feature List

- Set up BMC IP Address
- NM (Node Manager) 2.0 Management
- IPMI User and Configuration Management
- IPMI Sensor and Event Management
- FRU Management

### SMCIPMITool - CLI Based IPMI Utility

#### SMCIPMITool Feature List

- Remote IPMI Management
- Remote NM (Node Manager) Management
- Remote IPMI Sensor and Event Management
- Remote FRU Management
- Remote IPMI User/Group Management
- Remote Blade System Management
- IPMI Firmware Upgrade

### IPMIView - GUI Based IPMI Utility


#### IPMIView Feature List

- IPMI System Management
- KVM Console Redirection
- Text Console Redirection
- Virtual Media Management
- IPMI User/Group Management
- Trap Receiver
- Mobile App (Android/iOS)



## Supermicro Server Management Utilities Feature Summary

Features	SSM	SPM	SUM	SD5*	IPMIView*	IPMICFG*	SMCIPMITool*
Management Interface	Local (In-band) Remote (OOB)	Remote (OOB)	Local (In-band) Remote (OOB)	Local (In-band)	Remote (OOB)	Local (In-band)	Remote (OOB)
OS Support for Manager	Linux Windows	Linux Windows	Linux Windows	Linux Windows	Linux Windows	DOS Linux Windows	Linux Windows
Hardware Monitoring	✓			✓	✓		✓
Power Management	✓	✓					
Firmware Upgrades	✓		✓		✓ (IPMI FW)		✓ (IPMI FW)
Firmware Configuration	✓		✓		✓ (IPMI FW)	✓ (IPMI FW)	✓ (IPMI FW)
Discovery	✓	✓			✓		✓
Group Management	✓	✓	✓		✓		✓
Remote Power On/Off/Cycle	✓	✓		✓	✓		✓
Alert Notification	✓	✓		✓	✓		✓
User Interface	REST APIs, WebUI, CLI	GUI, CLI	CLI	WebUI, CLI	GUI	CLI	CLI
Mobile App					✓		

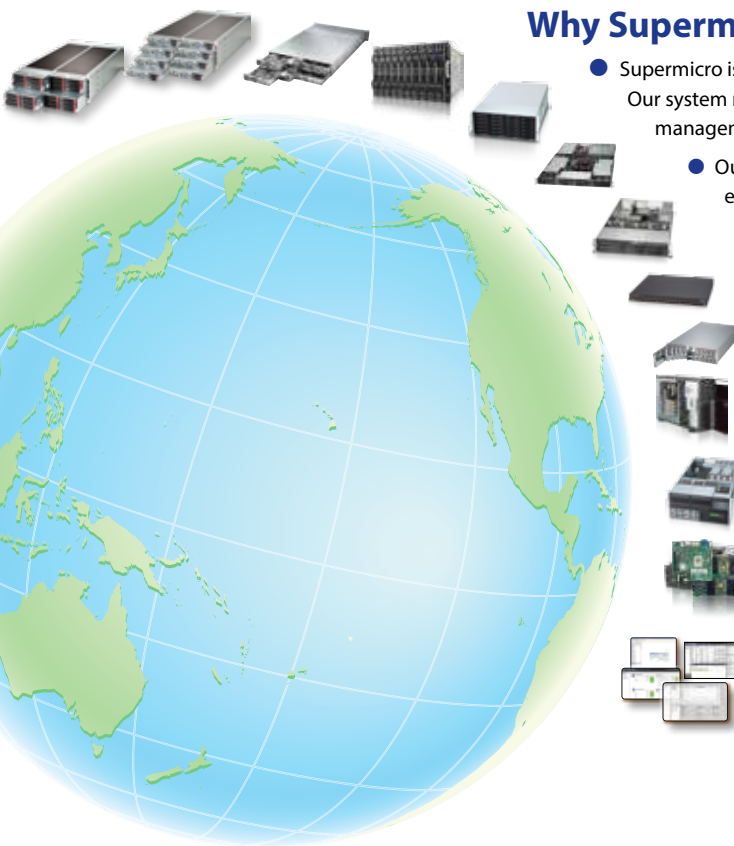

### Why Supermicro?

- Supermicro is a market leader in Green Computing and Server Building Block Solutions™. Our system management software ties these building blocks together to provide seamless management in data center operations.
- Our expertise in Enterprise IT, Cloud Computing, Hadoop/Big Data, and HPC environments provides customers with highly scalable, application optimized solutions designed to meet most challenging business requirements. Our expanded software features are designed to streamline IT operations with lights-out management functionality for remote monitoring, control, and maintenance.
- Every datacenter center is unique when it comes to its operations; Supermicro collaborates with you to integrate our system management software into your existing infrastructure. We provide customizable functionality via individual software modules to reduce your operational overhead and the total cost of ownership.
- Supermicro is committed to rapidly address customer issues. With our integrated hardware and system management software, you can be assured that you will receive the most optimized solution and the most effective technical support.

SKU	Description
SFT-DCMS-Single	Per node license for System Management Suite (all packages)
SFT-OOB-LIC	Per node license for OOB BIOS management mechanism
SFT-SPM-LIC	Per node license for Power Management Utility

Contact your Supermicro sales representative for more information

# We Keep IT Green®

**2U Simply Double**  
All Flash NVMe or SAS3  
2.5" or 3.5" drive bays

**SAS 3.0 • NVMe • 100G/50G/40G/25GbE**

**3U/6U MicroBlade**  
0.05/0.1/0.2U MicroBlade Servers  
in 3U/6U

**SuperBlade®  
Family**

**TwinPro™**  
New Generation Twin System  
4 DP Nodes in 2U,  
2 DP Nodes in 1U

**FatTwin™**  
8/4 Nodes in 4U  
Front or Rear I/O

**Datacenter Optimized**  
Datacenter PUE < 1.1  
47°C Ambient Server Solutions

**Ultra**  
Enterprise Class Computing

**All Flash Solutions**  
NVMe 2U/1U Storage Systems

**New! 60/90x 3.5"**  
Top-Loading Drives in 4U

**GPU/Xeon® Phi™ Supercomputing**  
Multi TeraFLOPS Servers/Workstations/Blades



**We Power the Cloud**



**Comprehensive Server, Storage and Networking Product Lines**  
Optimized for IT, Datacenter, Embedded, HPC and Cloud Computing



## Worldwide Headquarters:

**Super Micro Computer, Inc.**  
980 Rock Ave.  
San Jose, CA 95131, USA  
Tel: +1-408-503-8000  
Fax: +1-408-503-8008  
E-mail: Marketing@Supermicro.com

## Europe Subsidiary:

**Super Micro Computer, B.V.**  
Het Sterrenbeeld 28, 5215 ML,  
's-Hertogenbosch, The Netherlands  
Tel: +31-73-640-0390  
Fax: +31-73-641-6525  
E-mail: Marketing@Supermicro.nl

## Asia Subsidiary:

**Super Micro Computer, Inc. (Taiwan Office)**  
3F., No.150, Jian 1st Rd., Zhonghe Dist.,  
New Taipei City 23511, Taiwan  
Tel: +886-2-8226-3990  
Fax: +886-2-8226-3991  
E-mail: Marketing@Supermicro.com.tw

## China Subsidiary:

**Super Micro Computer, Inc. (Beijing Office)**  
Suite 1208 JiaHua Building D  
Shangdi, Haidian District, Beijing  
China 100085  
Tel: +86-10-62969165  
E-mail: Marketing@Supermicro.com

## U.S. East Coast Office


525 Washington Blvd., 20th Floor  
Jersey City, NJ 07310  
Tel: +1-201-256-4308  
Fax: +1-201-825-8878  
E-mail: Marketing@Supermicro.com

## Supermicro Science & Technology Park

No.1899, Xingfeng Road, Bade City,  
Taoyuan County 334, Taiwan  
Tel: +886-2-8226-3990  
Fax: +886-2-8226-3991  
E-mail: Marketing@Supermicro.com.tw

## Super Micro Computer, Inc. (Shanghai Office)

Room 1604, No 398, North Caoxi Road,  
HuiZhi Building, Xuhui District, Shanghai  
China 200030  
Tel: +86-21-61152558  
Tech Support: +86-21-61152556  
E-mail: Marketing@Supermicro.com



**SUPERMICRO®**  
[www.supermicro.com](http://www.supermicro.com)

## Supermicro Japan

S-7F N.E.S Bldg., 22-14, Sakuragaoka-cho,  
Shibuya-Ku, Tokyo, 150-0031 Japan  
Tel: +81-3-5728-5196  
FAX: +81-3-5728-5197  
Tech Support: japanservice@supermicro.com  
E-mail: Marketing@Supermicro.com

©Super Micro Computer, Inc. Specifications subject to change without notice. All other brands and names are the property of their respective owners. All logos, brand names, campaign statements and product images contained herein are copyrighted and may not be reprinted and/or reproduced, in whole or in part, without express written permission by Supermicro Corporate Marketing.



MKT-0002-06/2016-1.0