MAKING DATA SMART

Qsan Document - White Paper

How to configure iSCSI initiator in ESXi 6.x

Version 1.0
May 2015

Copyright

Copyright@2004~2015, Qsan Technology, Inc. All rights reserved. No part of this document may be reproduced or transmitted without written permission from Qsan Technology, Inc.

Trademarks

All products and trade names used in this manual are trademarks or registered trademarks of their respective companies.

Qsan Technology, Inc.

4F., No.103, Ruihu St.,
Neihu Dist., Taipei City 114,
Taiwan (R.O.C.)

Tel: +886-2-7720-2118
Fax: +886-2-7720-0295

Email: sales@qsan.com
Website: www.qsan.com

Introduction

In this document, we will guide users to understand how to use the software iSCSI initiator in ESXi 6.x to connect to Qsan AegisSAN LX P400Q dual controller system. We will also demonstrate the steps pertaining to how multipath I/O be configured with P400Q for achieving the expected throughput.

Environment

Host:	VMware ESXi server 6.0
NICs:	VMnic2 (management) VMnic0/VMnic1 (used for connecting to P400Q)
Storage:	Qsan AegisSAN LX P400Q-D316
Controller firmware:	V3.5.1
iSCSI data port:	172.16.135.10/24 172.16.136.10/24
LUN attached:	target10, LUN0, 3TB

Diagram

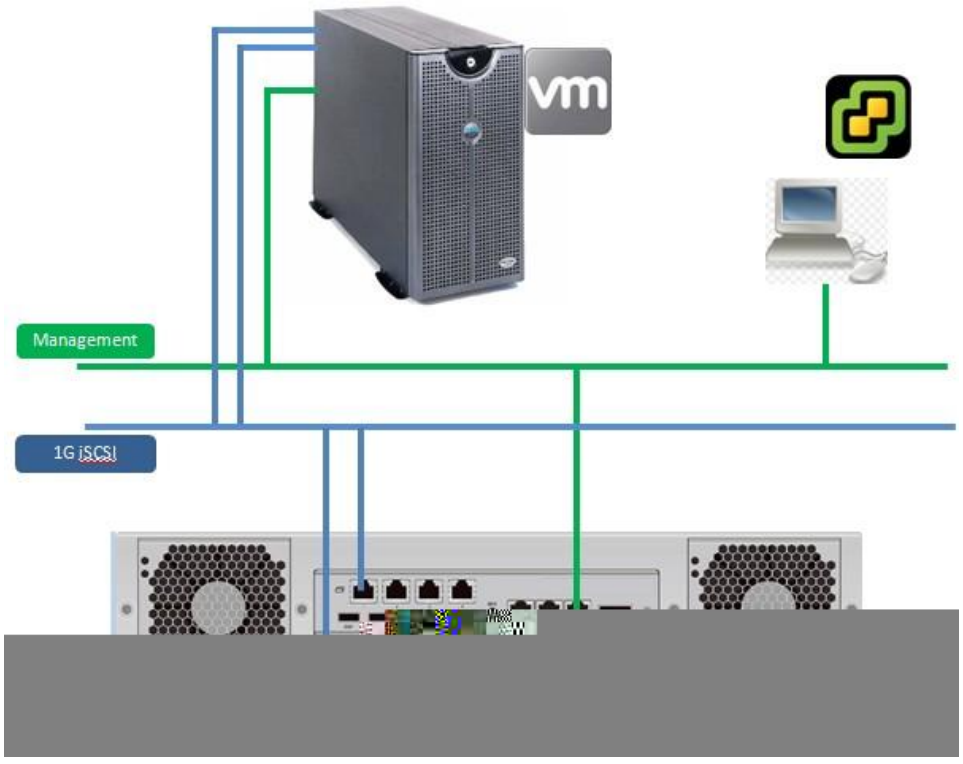

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

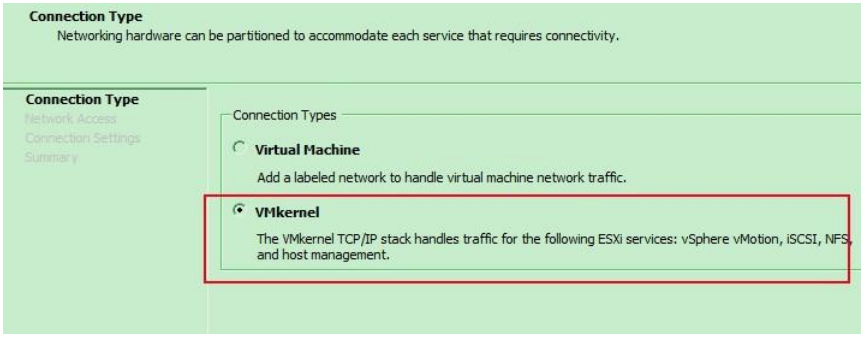

4. Create the first virtual switch and make sure to choose the right network interface which is connected to the same network with P400Q iSCSI data port.

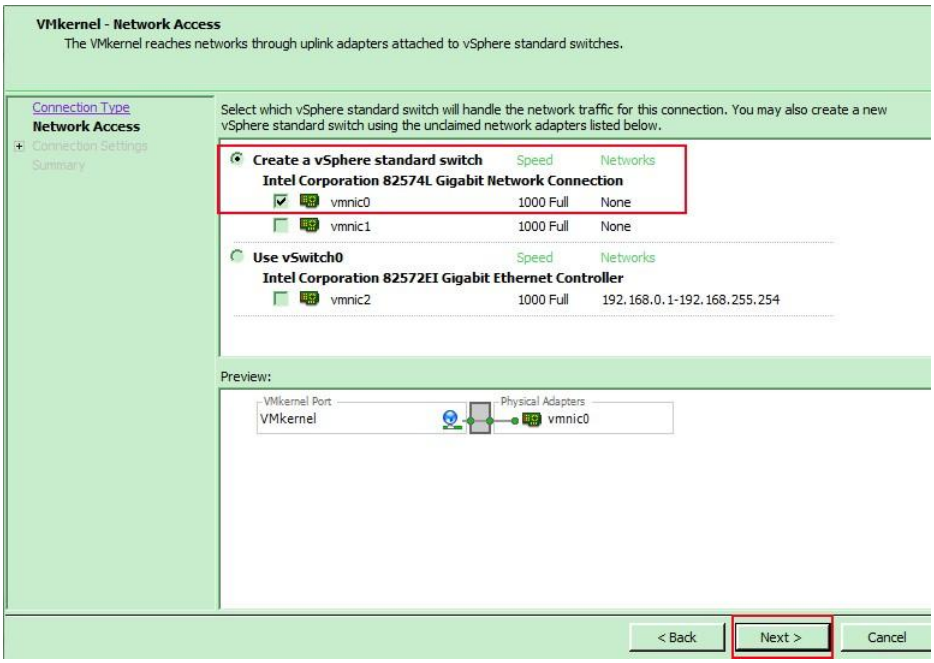

5. Specify **Network Label** and setup a proper **VMkernel** network IP which is used to connect to the iSCSI data port of P400Q.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

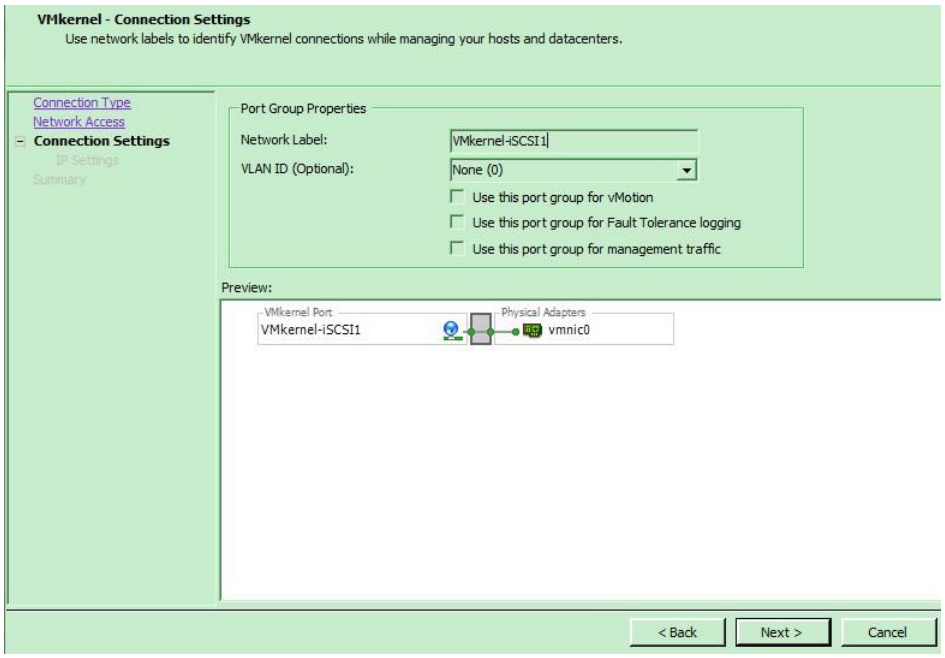

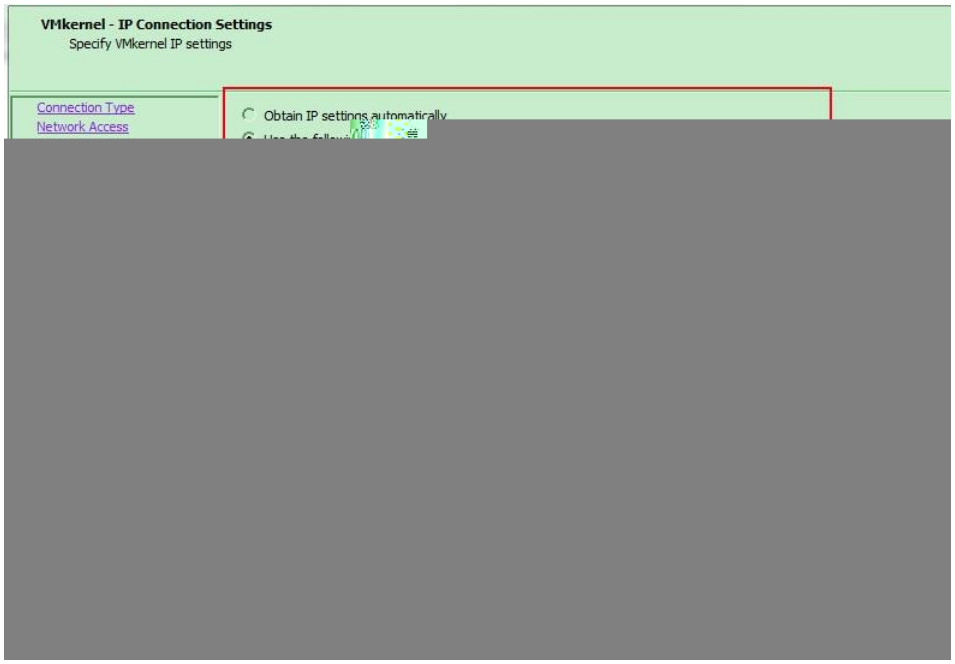

6. Check all configurations are correct, and then click **Finish** button.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

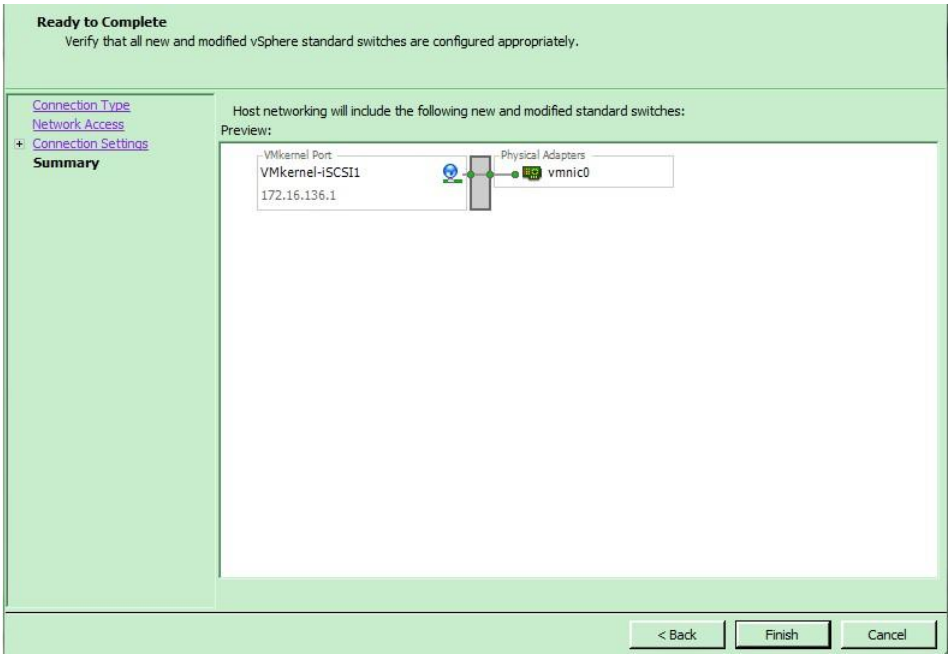

7. In order to create a multipath I/O session to the iSCSI target, it's necessary to add another **VMkernel** network, and we suggest to add another vSwitch for separating the network segment and preventing getting user confused

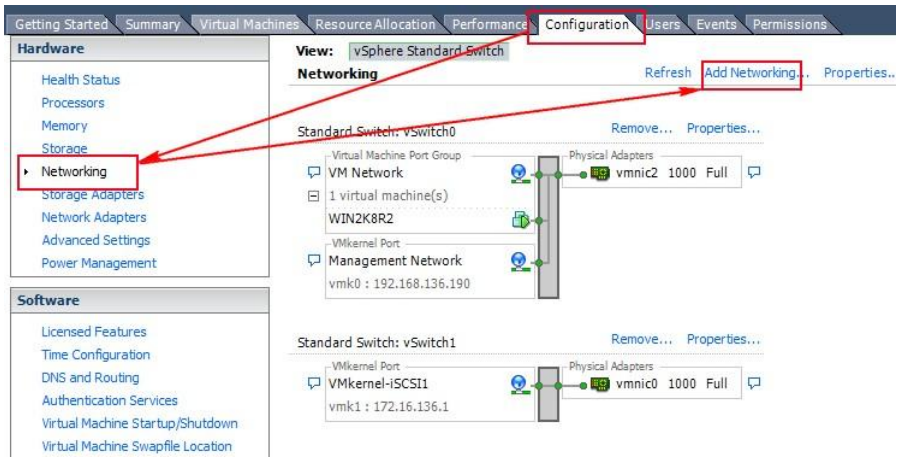

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

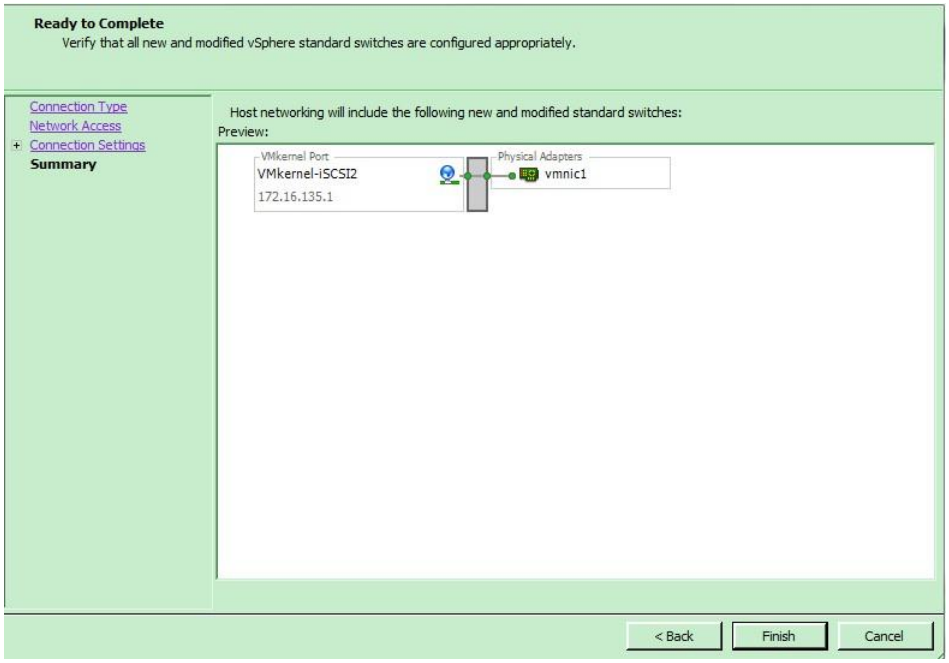

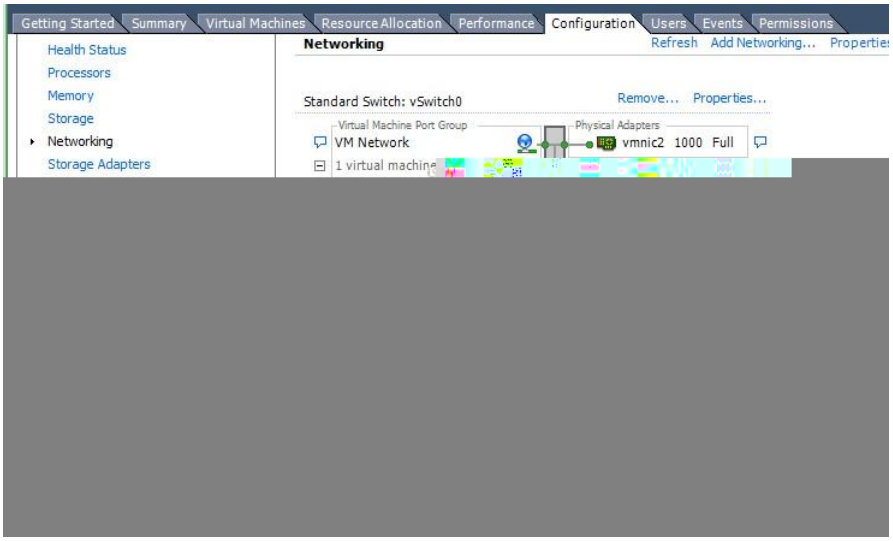

8. In **Configuration** tab, select **Storage Adapters** to list all available storage adapters. Choose **iSCSI Software HBA** and click **Properties** to modify the settings.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

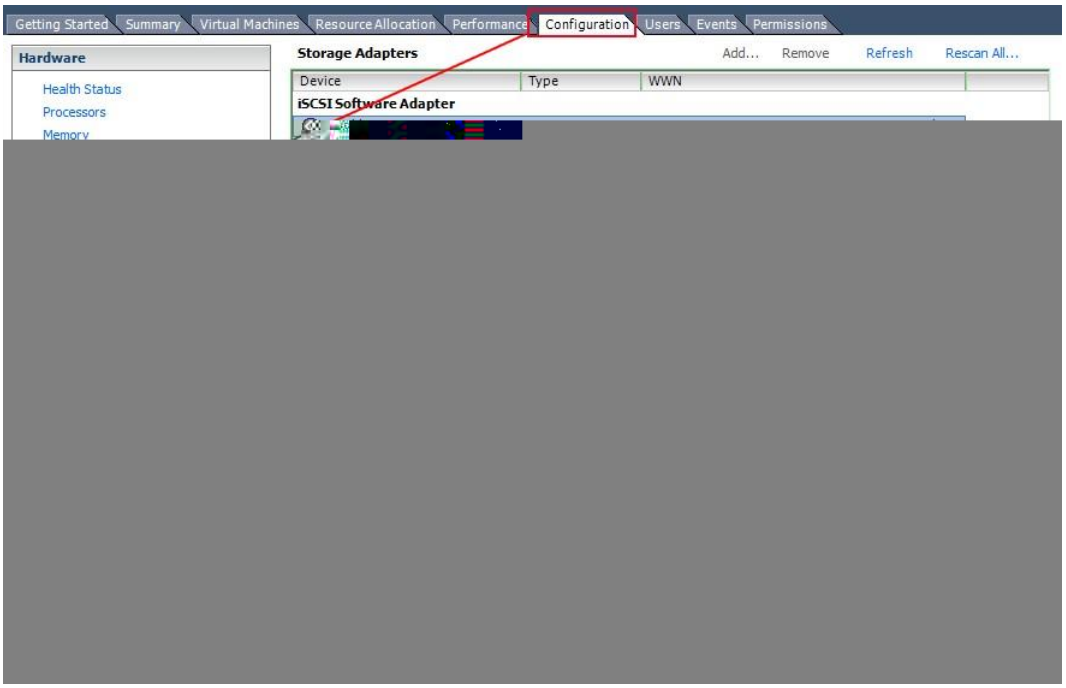

9. In **iSCSI initiator Properties**, select **General** tab and click **Configure** to enable iSCSI initiator.

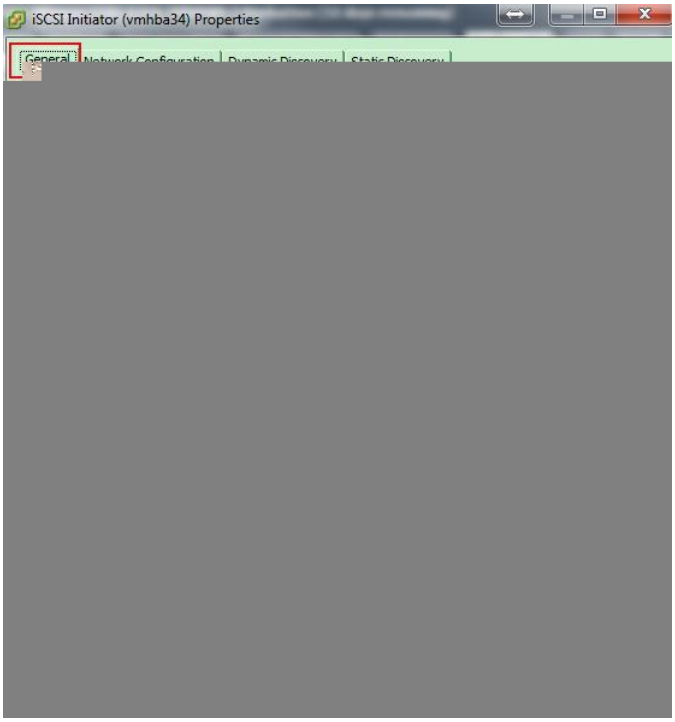

10. Next, please add another VMkernel port (default is one only) into the iSCSI initiator, so that the multipath session can be created smoothly.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

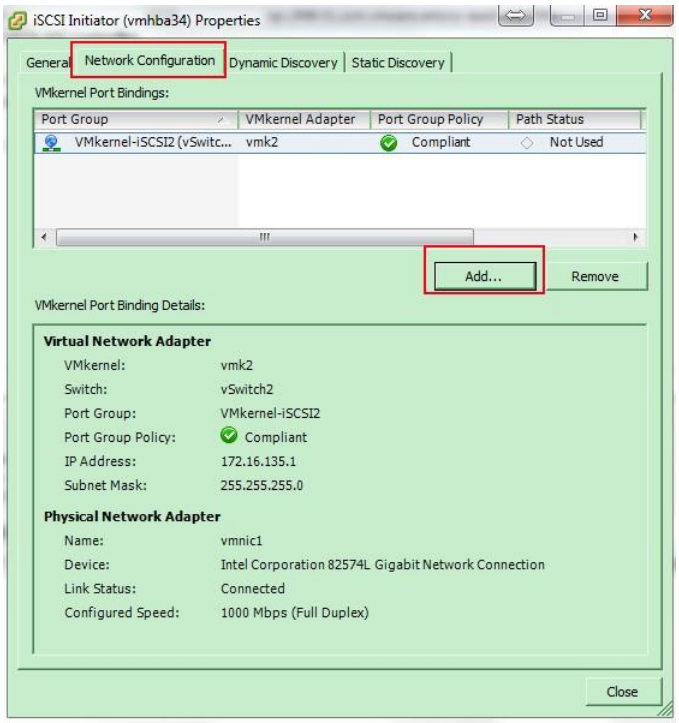

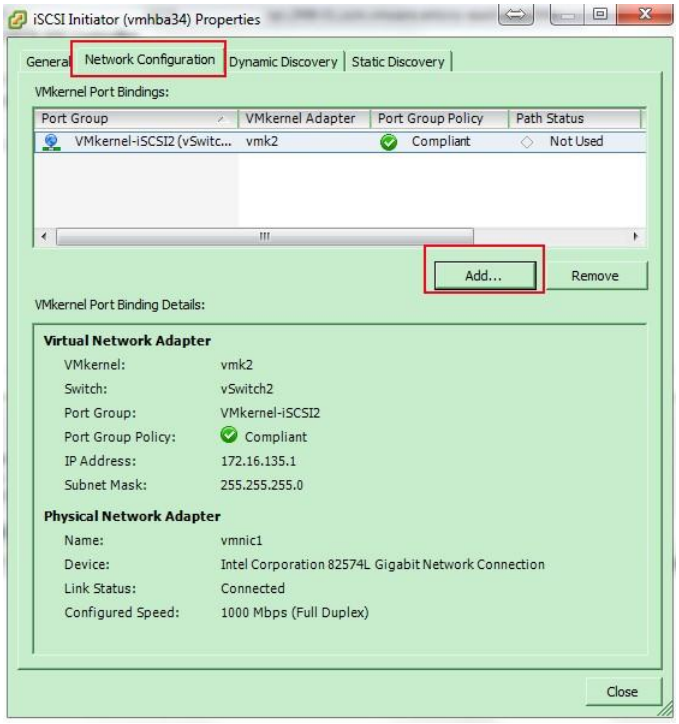

11. Go to **Static Discovery** tab, click **Add** button to set iSCSI target IP, here is iSCSI data port of P400Q.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

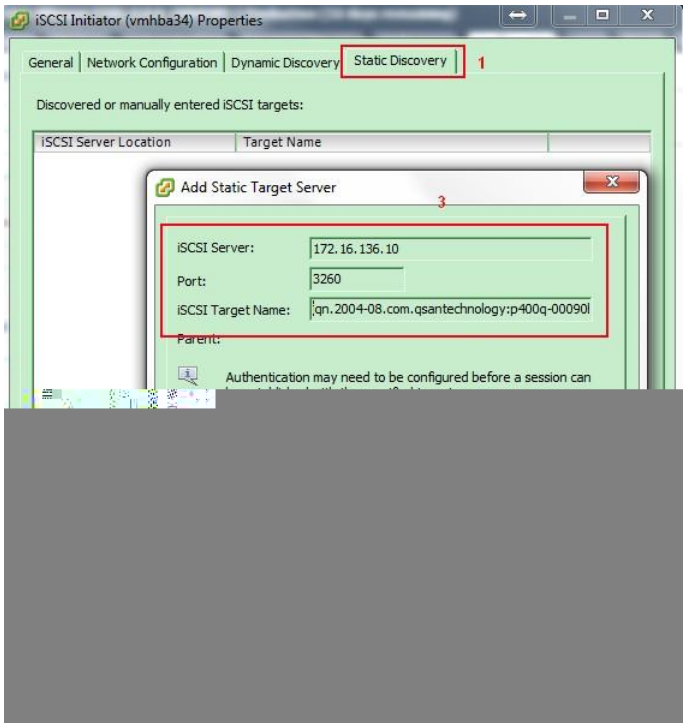

TIP:
The iSCSI target iqn can be found on web UI. Remember that the iqn is different if you are connecting to the iSCSI data port of controller1 and controller2 from ESXi server.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

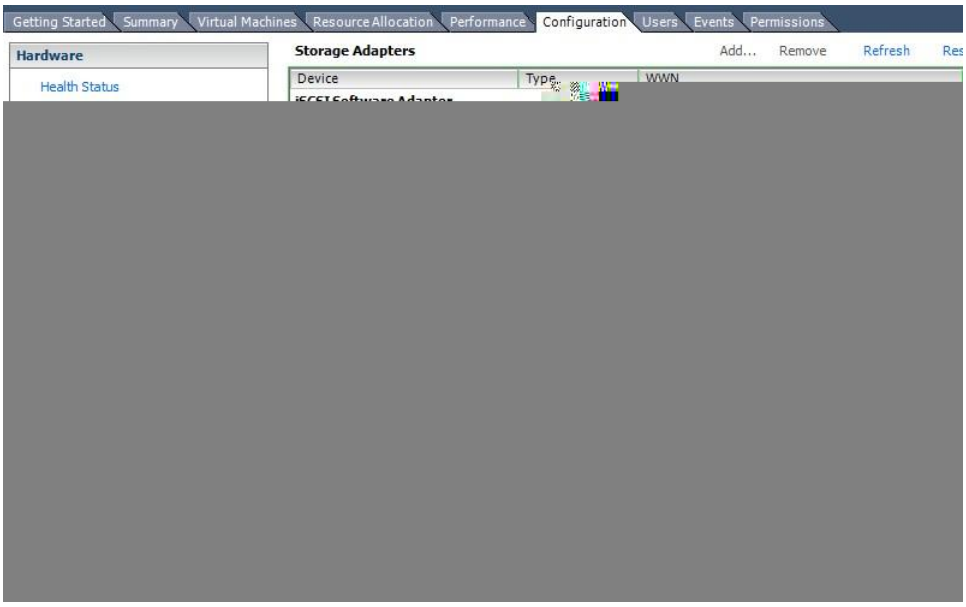

Add a new storage using the iSCSI LUN

1. The LUN will be used as a virtual disk of the created guest OS. In **Configuration** tab, select **Storage** and click **Add Storage**.

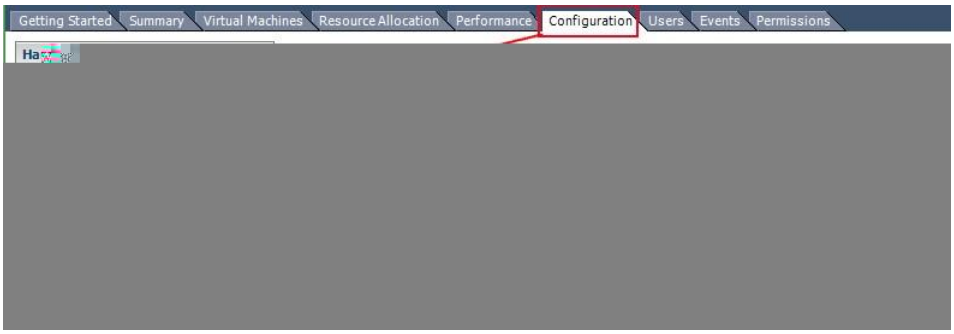

2. Select **Disk/LUN**, and click **Next** button.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

4. Enter a name for the new datstore, and click **Next** button.

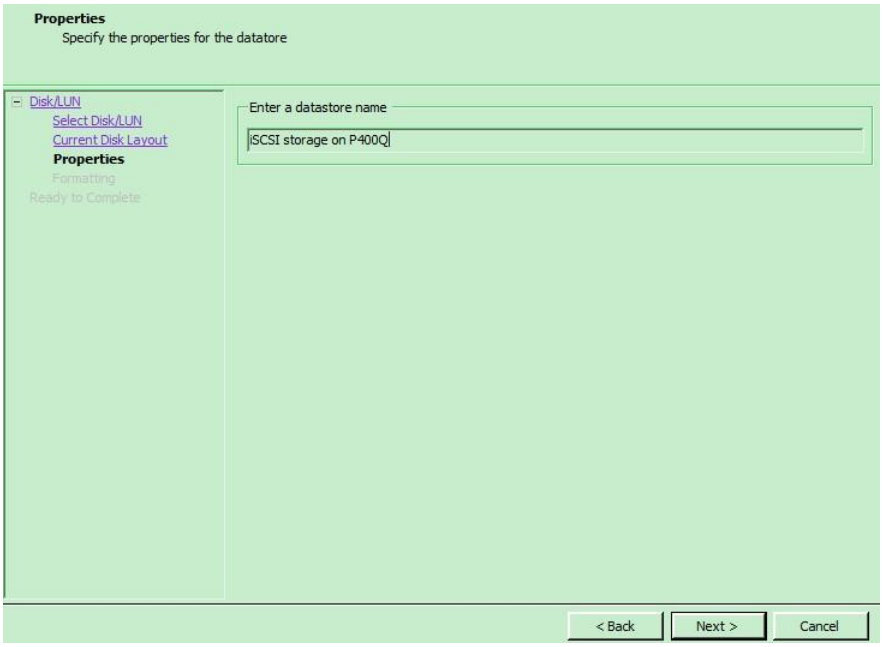

5. Click **Next** button.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

6. Check all settings, then click **Finish** button.

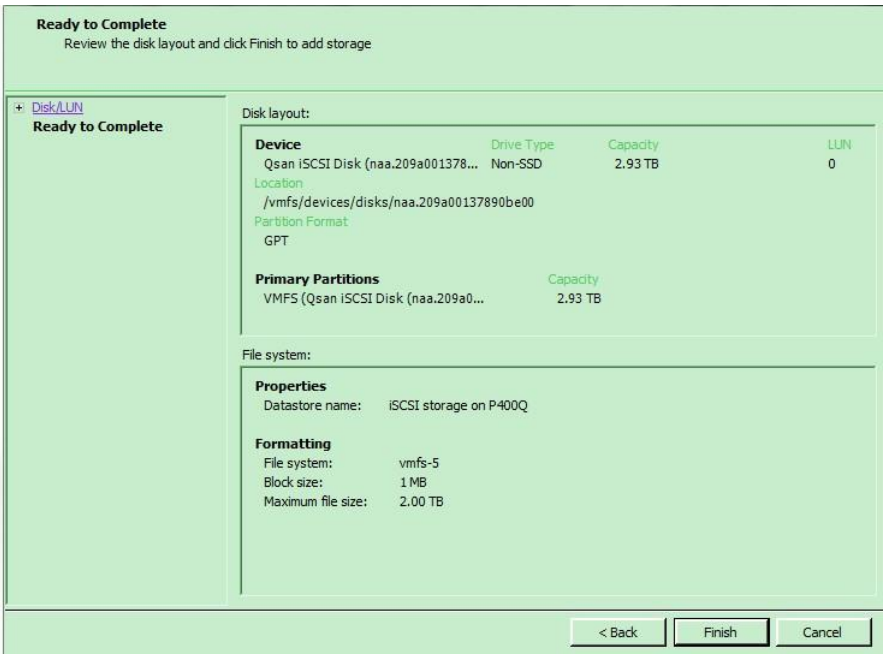

7. A new storage is added under **Datastores** of the ESXi server. The ESXi server provides settings to the multipath I/O. We can select the iSCSI storage and click **Properties** to modify the settings.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

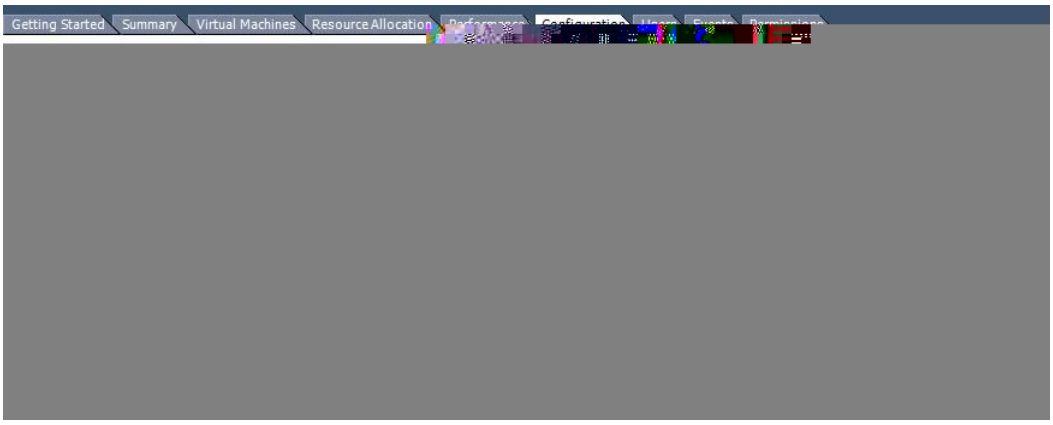

8. Select **Manage Paths** button.

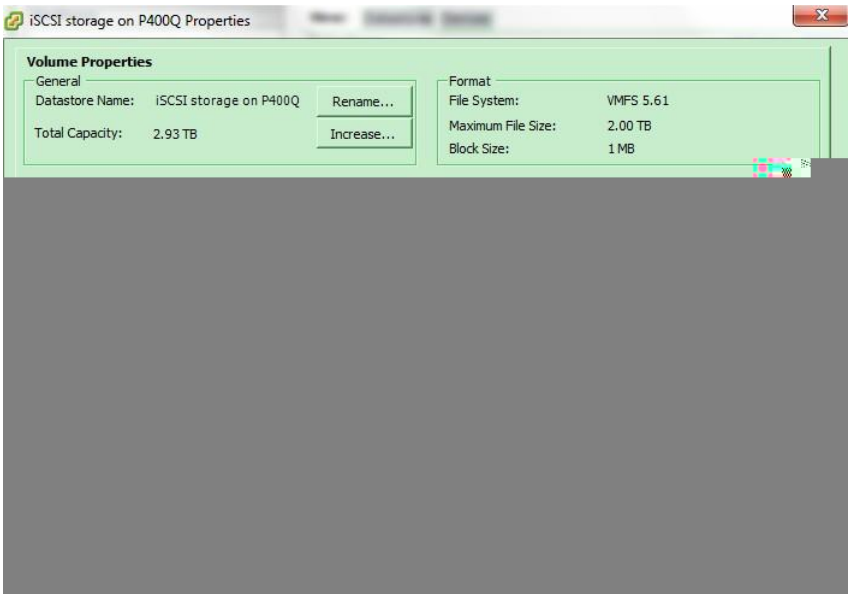

9. In **Manage Paths** window, it will display how many paths connect to this LUN and what path is active now. The policy is in **Fixed** mode by default, it can be modified by the drop-down menu. There are three types available, **Fixed**, **Most Recently Used**, and **Round Robin**. The difference between **Fixed** and **Most Recently Used** is that **Fixed** will make the active path to failback once the preferred path is restored from a failure status, but **Most Recently Used** policy will keep the active path stay in used. **Fixed** and **Most Recently Used** policies will use only one path to transfer the iSCSI network traffic at the same time, whereas **Round Robin** policy will use all available paths to transfer the data. Remember to click **Change** button for applying the setting.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

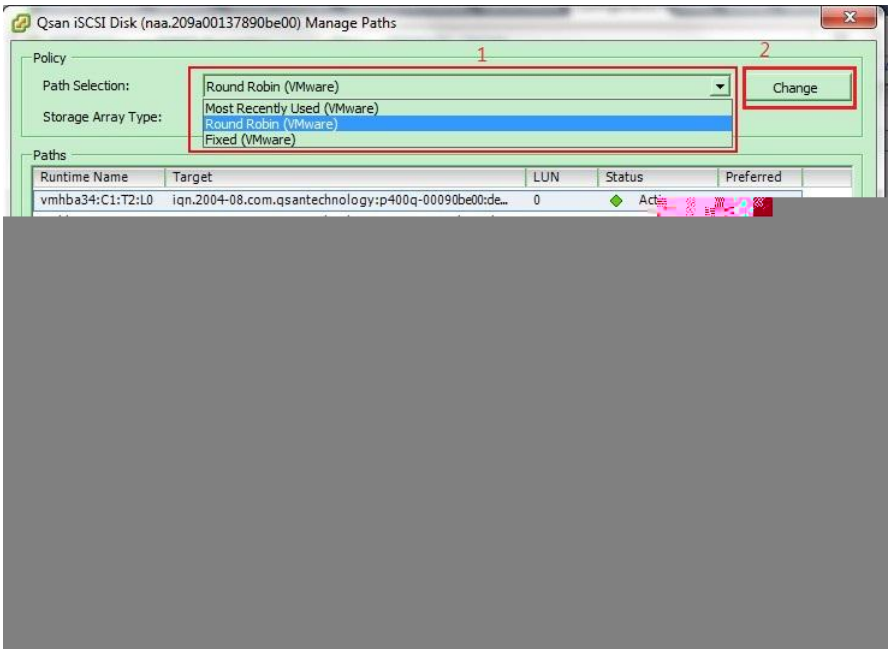

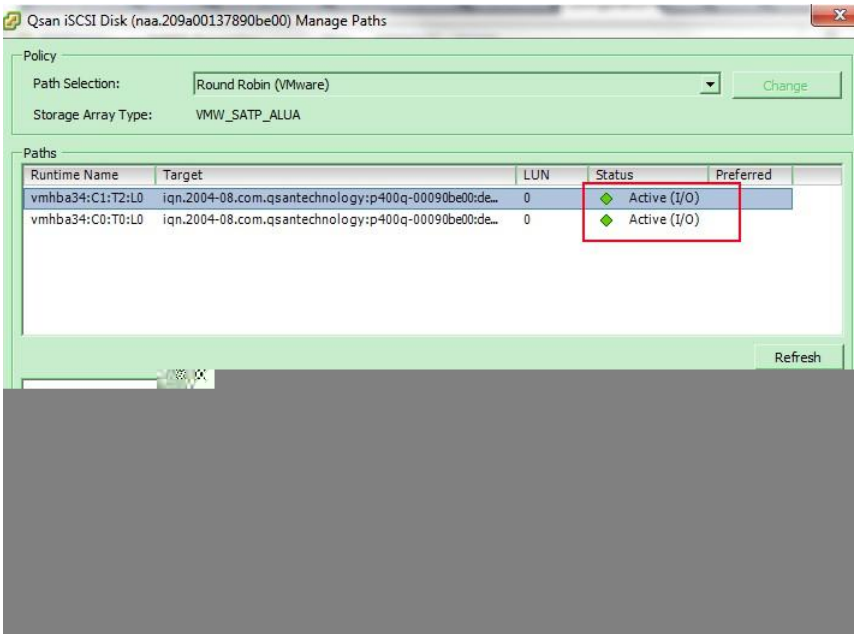

Add a new HDD to the created guest OS using the added datastore

1. Now the datastore can be added as a virtual disk of guest OS. Right click on the guest OS and select **Edit Settings**.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

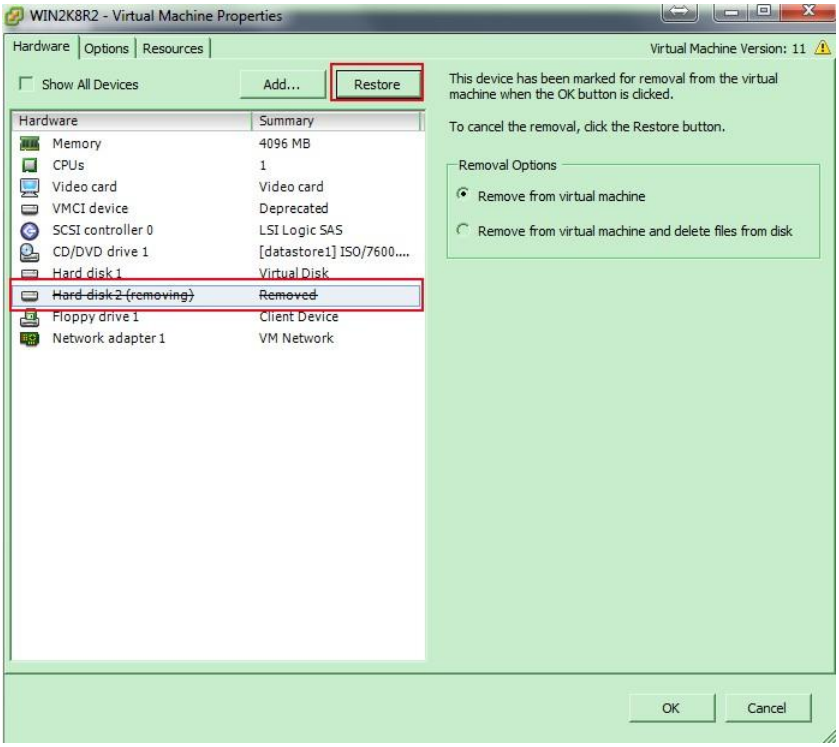

2. Remove the new added datastore on ESXi server.

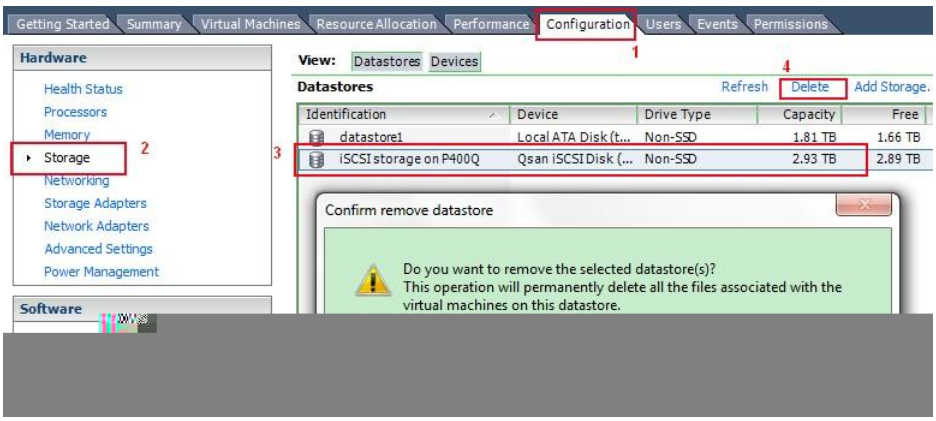

3. Log out both of the iSCSI targets.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

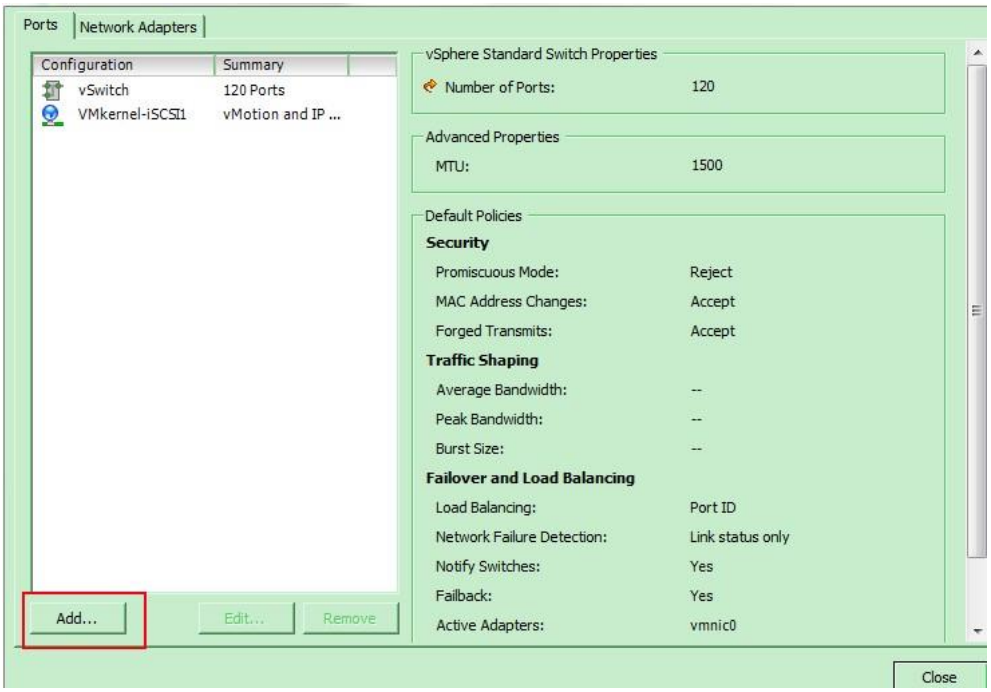

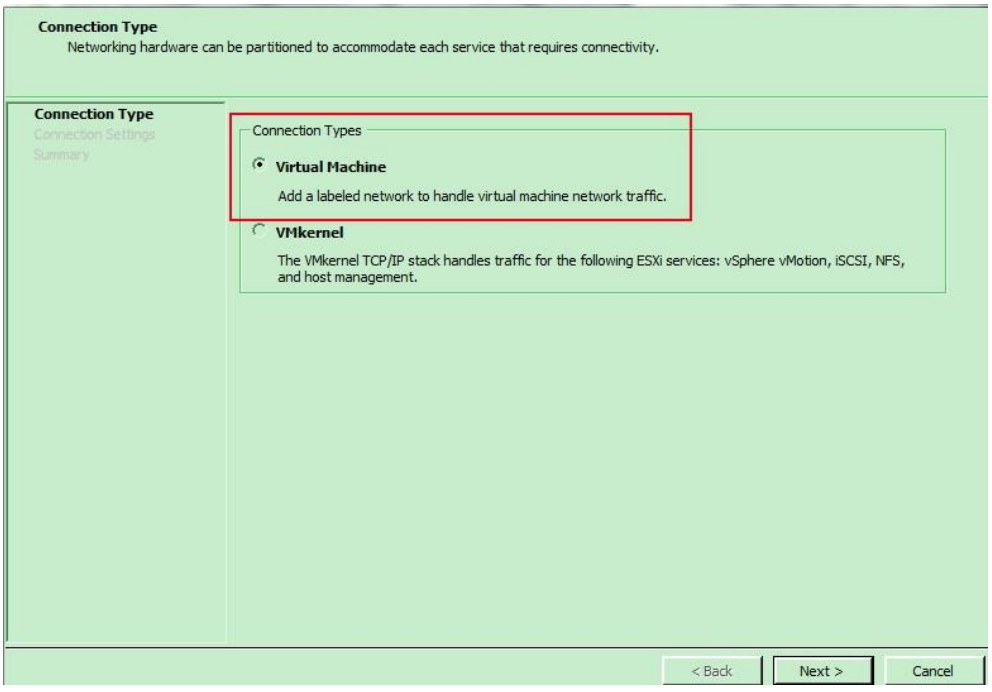

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

5. And so on for the other vSwitch, there will be another 2 VM port group available for VM guest OS.

6. Add 2 more Ethernet NIC to the created guest OS, using the VM port group that is created.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

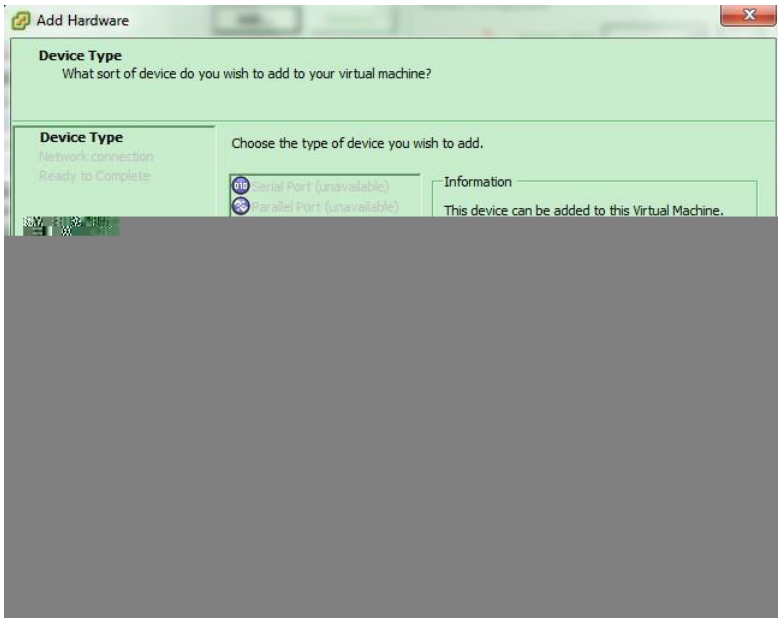

7. Configure the new added 2 NICs on the guest OS, so that the guest OS can ping to iSCSI data port on the P400Q, and log in the iSCSI target.
8. Verify the performance via IOmeter.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

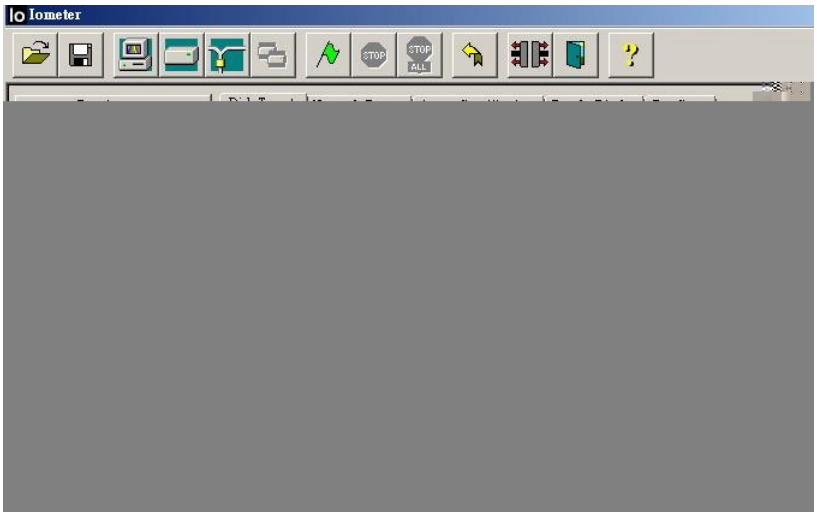

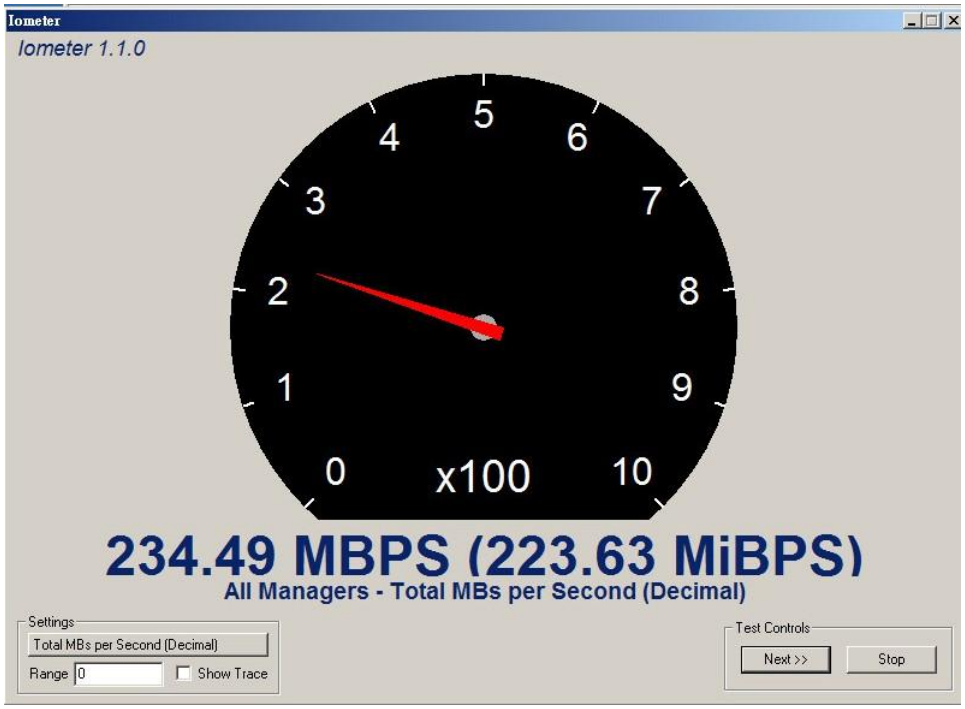

Conclusion

Qsan AegisSAN LX series products provide Active-Active dual controller and support ALUA, user don't have to pre-configure any option on P400Q system to achieve the redundancy between ESXi server and P400Q, just make sure the multipath I/O session is well-configured and the failover/back mechanism will automatically be executed once one of controllers gets failed.

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.

Applies To

- AegisSAN LX FW 3.5.1
- AegisSAN Q500: FW 3.5.0

Reference

- VMware documentation
  https://www.vmware.com/support/pubs/

Obsolete

- Qsan White Paper
  QWP200802-P150C-Connect_P150C_with_iSCSI_initiator_in_ESX3.5.pdf
  QWP200917-P300H-Connect_P300H_with_iSCSI_initiator_in_ESX4.0.pdf

Copyright@2004~2015 Qsan Technology, Inc. All Rights Reserved.