Questions and Answers about QThin

Version 1.2
April 2016

Copyright

Copyright@2004~2016, Qsan Technology, Inc. All rights reserved. No part of this document may be reproduced or transmitted without written permission from Qsan Technology, Inc.

Trademarks

All products and trade names used in this manual are trademarks or registered trademarks of their respective companies.

Qsan Technology, Inc.

4F., No.103, Ruihu St.,
Neihu Dist., Taipei City 114,
Taiwan (R.O.C.)

Tel: +886-2-7720-2118
Fax: +886-2-7720-0295

Email: Sales@Qsan.com
Website: www.Qsan.com

Introduction

The QThin - Qsan Thin provisioning feature is implemented after firmware version 3.0.0 on the AegisSAN LX series. In this document, we will introduce some questions and answers which you might ask about the QThin and help you to get more understanding about QThin. Please read it carefully before using any thin provisioned RG on the production unit.

QThin RAID Design

Question:

What is the relationship among the PD, RAID set, RG, VD and Granularity (the space unit for allocation and zero reclamation)?

Answer:

Here we would like to introduce the relationship with a simple example as below:

1. Creating a thin provisioned RG (RAID level 0) with 4 PD (100GB per each), and actually, a RG is created with a RAID set of RAID 0 with 4 disks.

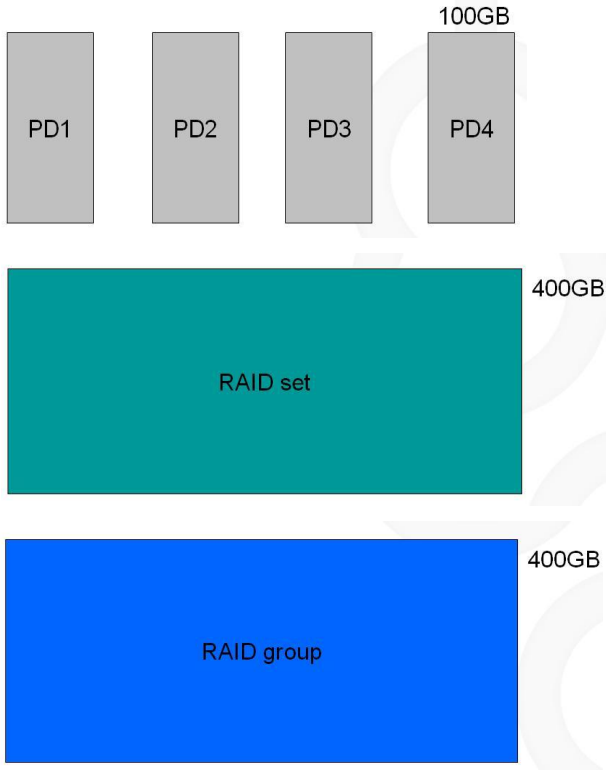

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

2. Creating a VD1 (100GB) on the RG which is of course a thin provisioned VD, the system will create a VD which does not occupy any physical capacity at the beginning.

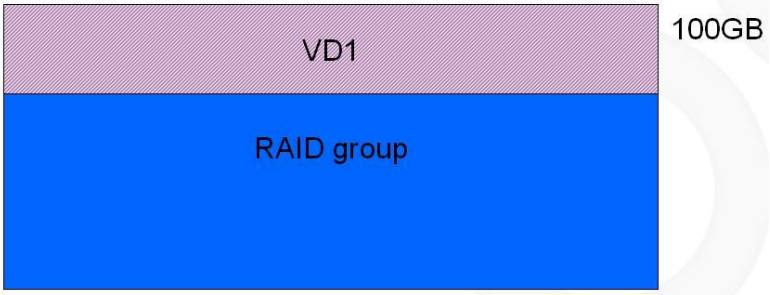

The storage will tell the server (host) that there is a 100GB VD1 can be used, and pretending the 100GB VD1 has been allocated on the RG. But in fact, the spaces on the RG will not decrease until reading or until any data is really written into the VD1 from the server (host). Such as the below illustration, there is a VD created on a thin provisioned RG, but the Free space will not be used before writing any data into the VD.

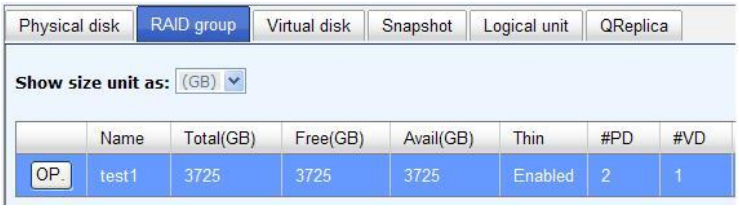

3. When you try to write data into the VD1 from the server (host), the system will allocate available space from the RG to the VD1 to store the data.

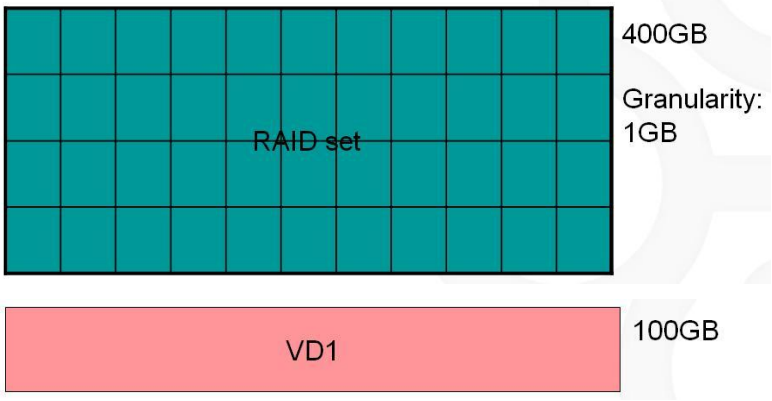

The RAID set will be divided by the Granularity (1 GB) which is the minimum size while allocating the space to a VD.

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

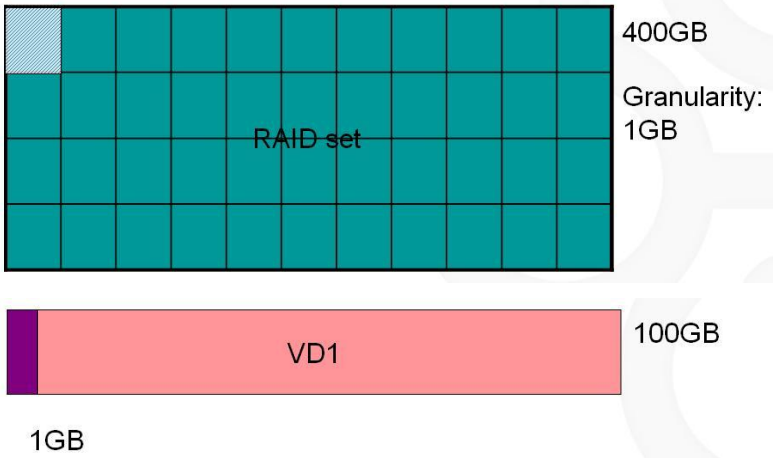

And it will also occupy one Granularity (1 GB) even the written data is less than 1 GB.

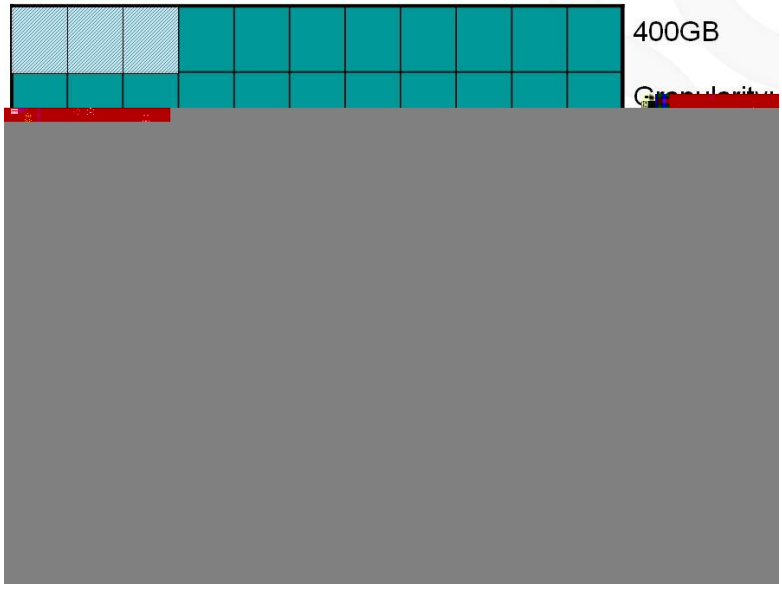

Even only 2.5 GB of data was written into the VD, there is still 3GB of physical space on the RG allocated to the VD.

4. And what if there are two or more RAID sets in the RG, and then creating two or more VDs? Which one of the RAID sets will the data be allocated to?

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

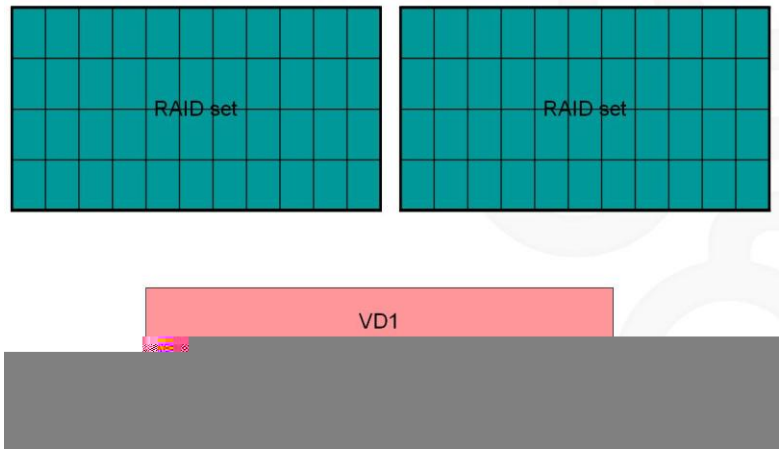

The system has its own policies (the health status of the RAID sets, the available capacity of the RAID and etc.) to judge which one of the RAID sets is proper to be allocated to a VD while space is demanded as the data changes. And you may observe which one of the RAID sets had been allocated with the data from the RG page on the web GUI when you clicked on the RG. For example, please see the below illustration, the space on the RAID set 2 is allocated more than on the RAID set 1.

Compatibility

Question:

Can I change the fat provisioned RG/VD to thin provisioned RG/VD, or change the thin provisioned RG/VD back to the fat provisioned RG/VD?

Answer:

The RG cannot be changed from fat to thin provisioned, or the other way around. You have to backup the data and destroy the RG to create the type of RG (fat or thin) to restore the data back.

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

Question:

If I am using the dual-controller, do I still need to schedule a down-time for upgrading the controller firmware from 1.x.x to 3.x.x?

Answer:

Yes, after upgrading the controller firmware to the 3.x.x version, please perform a cold reboot (shutdown and then power on) to the system. Otherwise, the system might have some abnormal behaviors during the reboot process. Due to the system perform rebooting on one controller after another which will cause the controllers with firmware 1.0.x and 3.0.x exist on the system at the same time and cause the problem.

Capacity

Question:

What is the maximum number or capacity of the thin provisioned RG and VD can be included in the system (such as AegisSAN LX)?

Answer:

Please see the below comparison form between fat provision and thin provision:

RG / Max.	Fat Prov. RG	Thin Prov. RG
PD - system	192	192
VD - system	4096	4096
PD - RG	64	256
PD - RAID set	N/A	64
RAID set - RG	N/A	32
Space - RAID set	N/A	64 TB
Space - system	No limitation	256 TB
Space - VD	No limitation	128 TB

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

Answer:

The snapshot space will follow the property of the thin provisioned VD. If the “Space reclaim” option is enabled when creating the VD, the system will check if the snapshot space could be reclaimed in real time. And if performing the “Space Reclamation” function on the VD, the system will check the whole VD as well as the snapshot space in background, sees if there are any zero spaces could be reclaimed.

Performance

Question:

When using the thin provisioned

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.

Summary

The above questions and answers might be helpful for you to save times when you tried to use and realize the QThin function. Due to the behaviors of thin provisioned VD are different comparing to the thin provisioned VD, please try to test much more scenarios for making sure that you are very familiar with each scenario of the QThin before you will store your valuable data into the QThin VD.

Reference

- Wikipedia - Thin provisioning
  http://en.wikipedia.org/wiki/Thin_provisioning

Copyright@2004~2013 Qsan Technology, Inc. All Rights Reserved.