


EVOLVEO[®]

MODEL

VERSION / DATE



1. DESCRIPTION OF EQUIPMENT	3
2. SAFETY NOTICE	4
3. TECHNICAL PARAMETERS	6
4. PACKAGING CONTENT	7
5. PRODUCT DESCRIPTION	8
6. BASIC FUNCTIONS	11
7. WARRANTY AND POST-WARRANTY SERVICE	14



The EVOLVEO LULLA is a compact and easy-to-use audio baby monitor that allows you to stay in touch with your baby even when you are not near them. The device offers two-way audio transmission, so not only can you hear what's going on in the baby's room, but you can also talk to the baby remotely. Thanks to the integrated lullabies, you can easily soothe your baby without having to come in person.


The device consists of two parts - a baby unit that stays with the baby and a parent unit that you can take around the house or garden. Both units feature a high-quality microphone and speaker, intuitive controls and clear LED indicators for volume, connection and battery status.


EVOLVEO LULLA uses stable 2.4GHz wireless technology to ensure reliable transmission without delays and interference. The range of the baby monitor is suitable for use in a normal home - it can easily cover multiple rooms or a small garden.

The baby monitor is easily charged using the modern USB-C connector. On a single charge, the device can run for several hours, and thanks to the handy

lullaby timer, you can set it to turn off automatically after 30 or 60 minutes.


Two USB-C power cables are also included. The materials and construction used meet the requirements for safe use in environments with small children. The compact dimensions and the possibility of attaching to a cot or stroller make EVOLVEO LULLA the ideal helper for daily and nighttime monitoring of the child.

- 
- Safety notice
 - Please read the following safety instructions carefully before using it for the first time. Failure to do so may result in health risks to the child, damage to the device or product malfunction.
 - ⚠ This product is not a toy. Don't let the kids play with it.
 - ⚠ The device is not intended for use as a medical device. It is not a substitute for adult supervision - the child must be checked regularly.
 - Never place the baby unit or power cord in or over a cot, basket or playpen.
 - ⚠ Always place the powercord out of the child's reach - at least 90 cm away from the child to avoid strangulation.





- The device is intended for indoor use only - it is not waterproof.
- Do not use the device near water, for example in the bath, at the sink, washing machine or in wet areas.
- Do not install near heat sources such as radiators, stoves, heaters or direct sunlight.
- Protect the equipment from falling or bumping.
- Use only the original accessories and power cables supplied by the manufacturer for charging.
- Disconnect the device from the mains when there is a storm or if you do not use it for a long time.
- Do not attempt to open or repair the device yourself - in the event of a fault, contact an authorised service centre.
- Operational safety:
- Maintain a distance of at least 1 metre between the parent and child unit to avoid acoustic feedback (whistling).
- Check the functionality and signal strength before use and each time you move the device.

- Do not use other wireless or strong emitting devices near the baby monitor that could cause signal interference.

- 
- Frequency band: 2.4 GHz (digital transmission without Wi-Fi/Bluetooth)
 - Battery capacity: 1000 mAh (3.7 V, 3.7 Wh) - in parent and child unit
 - Battery life per charge: up to 8 hours of use (depending on usage)
 - Signal range:
 - up to 300 m in the open
 - up to 30 m indoors
 - Charging type: USB-C (cables included)
 - Charging cable length: 100 cm
 - Connection indication: LED connection status light
 - Charging indication: red/green LED
 - Body material: durable ABS plastic
 - Strap: silicone, adjustable, 2 hanging positions
 - Controls: physical buttons for volume, lullabies, power and intercom
 - Speakers: integrated, loud and clear playback
 - Microphones: two-way transmission - parent ↔ child
 - Dimensions: approx. 90 × 45 × 20 mm
 - Weight: approx. 100 g/unit
 - Operating temperature: 0 °C to 45 °C

- Operating humidity: 10-80 % (non-condensing)

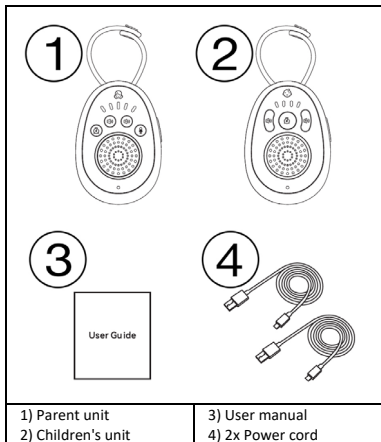

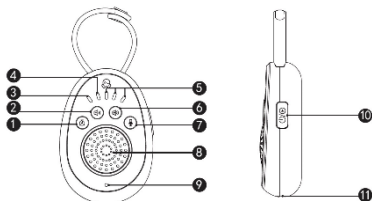

A short press of the button starts or switches the lullaby. Long press to activate or deactivate the timer (30/60 minutes).

Reduces the volume of lullaby reproduction and voice transmission.

Glows red during charging, green when the battery is fully charged.

After switching on, it lights up for 5 seconds. When the device is connected, the light is on permanently. If the signal is lost, it will flash rapidly.

Displays the level of sound picked up by the baby unit. If the battery is low, the third LED will flash.

Increases the volume of voice reproduction and transmission.


Hold the button to speak to the child. After the release, the transmission is terminated.

Provides playback of lullabies and voice from the second unit.

Captures sounds from around the child or parent (depending on the unit).

Long press to switch the device on/off. Press briefly to stop the lullaby playing.

Modern and easy connection for charging your device using the supplied cable.



Press briefly to start the lullaby or switch to the next tune.

Long press to activate or deactivate the timer (30 or 60 minutes).

Used to mute lullaby playback and voice transmission.

Glow red when charging. Turns green when the battery is fully charged.

After switching on, it lights up for 5 seconds. If the connection is active, the light will remain on. If the connection is lost, it will flash rapidly.

Long press the lullaby button to activate the 30-minute timer. When the time is up, the music will stop

automatically and the indicator light will go off.
The light also flashes when the battery is low.

Long press the lullaby button (2 times in succession) to activate the 60-minute timer. After 60 minutes, playback will automatically stop and the indicator light will go off.

It is used to increase the volume of lullabies and voice transmission.

Provides audio playback from the parent unit or lullabies.

It records sounds from around the child for transmission to the parent unit.

Long press to switch the device on or off.
A short press can end the lullaby at any time.

It serves for easy and modern recharging of the battery of the children's unit.



Hold the power button for 3 seconds - the device will turn on and the voice prompt "Power on" will sound. To switch off the device, hold the button again for 3 seconds - you will hear "Power off".

The same procedure as for the parent unit - long press the button to switch the device on or off. An audible prompt will announce the on/off status.

The "+" button increases the volume of lullabies and voice transmission, the "-" button decreases it.

There are 5 volume levels. A short beep sounds when the lowest or highest level is reached.

The volume control works the same way - use the "+" and "-" buttons to adjust the volume of the lullabies and the intercom. Total of 5 levels, acoustic signal at min./max.

Press the note button to start the lullaby. Each subsequent press switches to the next melody.

There are 5 tracks in total.

The sixth press activates playback of all tracks in the loop.

You can stop playback at any time by briefly pressing the power button.

Music is only played on the children's unit. The parent unit controls playback remotely.

The intercom activates automatically when you switch it on - no need to press anything.

Hold the microphone button if you want to talk to the child. Releasing the button will terminate the transfer.

Long press the lullaby button for 3 seconds:

- one touch to activate the 30-minute timer
- two presses to activate the 60-minute timer
- Press the timer off for the third time

The timer function is controlled in the same way as on the child unit.

The timer only controls the playback of lullabies. If no lullaby is playing, turning on the timer will automatically start playback.

[REDACTED]

All repairs and servicing can only be carried out at an authorised service centre for EVOLVEO products. For a current list of service locations, please visit www.evolveo.com. Tampering with the equipment outside of an authorized service facility may result in damage to the equipment and may



[REDACTED]

The crossed-out container symbol on the product, in the documentation or on the packaging means that within the European Union, electrical and electronic equipment, batteries and accumulators must be disposed of

. At the end of its useful life
this product , but take it to a place
designated for environmentally friendly recycling.



Company hereby declares
that
complies with the requirements of all relevant
regulations and standards, including
. The device operates in the band

and uses its own wireless communication technology (not connected to Wi-Fi or Bluetooth).

- - Electromagnetic compatibility - General requirements
- - Electromagnetic compatibility - Data transmissions in the 2,4 GHz band
- - Radio equipment operating in the 2,4 GHz band - EMC and spectral requirements
- - Assessment of human body exposure to electromagnetic fields
- - EMC for multimedia equipment
- - Immunity of multimedia equipment to interference
- - Higher harmonic current emissions
- - Voltage fluctuations and flickers
- - Safety of audio/video, information and communication technology equipment

is available online at: <http://ftp.evolveo.com/ce/>

Abacus Electric, s.r.o.
Planá 2, 370 01 České Budějovice, Czech Republic
Email: helpdesk@evolveo.com

Made in P. R. C.
© 2025 Abacus Electric, s.r.o.

www.evolveo.com
facebook.com/EvolveoCZ

All rights reserved.
Product design and technical specifications are
subject to change without notice.