

EVOLVEO


EasyPhone FM



www.evolveo.com

Dear customer,
Thank you for choosing an **EVOLVEO**
mobile phone.

Important notice

	Use a headset when calling while driving a motor vehicle. Only park your car on the side of the road in order to proceed with a phone call in emergency situations.
	Turn off the phone when entering plane and don't turn it on aboard.
	Use caution when operating this phone in the vicinity of pacemakers, hearing-aids or other medical devices that can interfere with the phone.
	Never attempt to disassemble the phone by yourself. In case you have trouble with this phone, please contact reseller or support and service.



Do not connect phone to a charger when the battery is not inserted.



Protect this phone against magnetic field. Keep away from items with magnetic elements, such as credit cards.



Protect against liquids. In case of liquid intrusion or corrosion immediately remove the battery and contact your reseller.

PHONE DESCRIPTIONS






1	Torch	12	Micro USB jack
2	Receiver	13	Charging cradle
3	Call key	14	Volume +
4	End key	15	Volume -
5	Number key	16	FM Radio switch
6	Up key	17	Torch switch
7	Down key, menu key	18	Unlock
8	Star key	19	Lock
9	Hash key	20	Speaker
10	String hole	21	SOS key
11	Earphone jack	22	Camera

KEYS	FUNCTIONS
Call key	<p>Press this key to realize the function which display on the left-down corner;</p> <p>Press this key to make a call when select a number;</p> <p>Press to answer an receiving call;</p> <p>Press to enter call history under standby mode.</p>
End key	<p>Press this key to enter phonebook under standby mode;</p> <p>Press this key to go back to previous menu;</p> <p>Power Off: Long press to power off under standby mode;</p> <p>Power On: Long press to</p>

	<p>power on if the phone is power off; Press this key to go back to standby mode; Press this key to end a call.</p>
<p>Down key, menu key Star key</p>	<p>Press them to scroll the options when browsing a function list; Under standby mode, press down key to enter Menu and press up key to enter SMS function; In "FM radio", they adjust the frequency ;</p>
<p>Number keys</p>	<p>Dial numbers under standby mode and enter numbers and characters in editing mode;</p>

* Key	Under standby mode, press * key twice to display “+” to call international numbers
# Key	Switch input method under text edit interface.
Side Key	Volume key: Adjust volume in conversation, video player, FM radio switch; Press up & down to on/off; Torch key: on/off torch.

SIM Card slot / TF Card slot position as below:

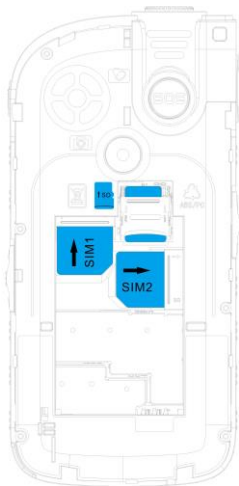

CALL

At Standby, input a phone number and press key “call” to make a call.

To end or reject a receiving call, press the End key.

MESSAGE

Enter this menu, you can view:

- Write message
- Inbox
- Outbox
- Drafts
- Sentbox
- Security inbox
- Templates
- Settings
- Message capacity

The capacity of messages is due to maximum storage capacity built in

mobile phone and external SIM cards. And you can check the memory status of the SIM cards or mobile phone.

PHONEBOOK

Phone contact can store up to 250 phone numbers, while SIM cards contact capacity depends on the network operator, please consult the local operator.

1. Speed Dial

Setting a phone number which can be called by long press the number keys 2-9.

Select "Menu", the scroll to "Phonebook" function Down key.

Select “Options/Others/Speed Dial” and set number 2-9: There you can edit and save 8 speed dial number which are correspond to the number keys 2-9. After the speed dial status is On, press and hold one of the 8 speed dial number keys when the phone is in the standby state, the phone will make phone call to the corresponding phone number which has been existed in the speed dial number list.

CALL LOGS

In the main menu, you can enter call logs to view missed calls/dialed calls/received calls/delete call logs and call timers to view call logs.

MULTIMEDIA

1. Camera

Camera supports photographing function, you can take pictures by press Up key with the embedded camera and adjust the camera settings. If the mobile phone memory is insufficient, please delete certain pictures or other files in “File manager”.

In the camera options, the pictures can be view and can be set by “Camera settings”, “Image settings”.

2. Video Recorder

Press Camera Up key to start video recording. The recording time depends on the time limit and the capacity of the memory card. Enter options to perform

the following settings: Switch to camera, Camcorder setting, Video settings and Storage.

3. Audio player

The screen of the music player shows the caption: List, Back. Accessing list will show the name of the music that you have downloaded. Selecting one song of them, you can enter into a list: Play, Refresh list and settings by choosing "options" which is under the detailed list. If your detailed list is empty, you can only see Refresh list and Settings.

Press the **Up & Down** to switch to the previous song and the next song separately.

Number 5 key: Pause and Play

Volume: Press the volume keys to

change the volume for playing.

4. Video Player

Enter Video player. Press Call key to enter options.

5. FM Radio

You can perform the followings operations as your need:

Press FM Radio switch to power-ON/OFF.

Press Volume Key to adjust volume

Press UP-DOWN Key for SEARCH Channel Automatically

Channel list: it list the channel which searched by hand or auto search.

Settings: “Background play”, “Loudspeaker” can be switch on/off.

Record: The FM program can be record by “record” function.

6. Sound recorder

Enter Sound recorder, press key OPTION to Select New Record start recorder, and you can operate below options: New record, Play, List.

7. Image

With this function, you can select any picture and press Call key to perform the following operations: View, Rename, Delete etc.

SOS SETTINGS

You can switch on/off, setting number, SMS content.

SOS Setting: Select “Menu”→”Settings”
→ “SOS Setting”, set “Status” as “on”,
then input SOS number in Number 1~5.
And you can also set remind messages.

SOS procedure: When SOS status on
and long press key “SOS”, the SOS
function started with below:

A loud emergence alarm will be shouted,

At the same time, a SMS with content
“Emergency, please help me” will be sent
to all the emergency number;

It will start to call the emergency number
one by one, each number will call 3
times;

If somebody answers the call, the SOS
will be stopped; or if all the people don't

answer the call, it will stop after call all the number 3 times.

SETTING

1. Call Setting

Dual SIM settings :

In this function, you can customize the SIM card open mode among “Dual SIM open”, “Only SIM 1 open”, “Only SIM 2 open”, “Flight mode”.

Call divert: It includes five different situation, including Divert all voice calls, Divert if unreachable, Divert if no answer, Divert if busy and Divert all data calls; select Cancel all diverts can let all of

them deactivated.

Call waiting: Open or close this function; choose query to check the current state of it.

Call barring: Restrict the numbers which you will dial or receive.

Advanced settings:

Auto redial: After open this function, the phone will dial the number again automatically every time when the out call fails or be rejected.

Attention: Parts of the functions need network operator's support.

2. Phone settings

In this function, you can set Time and date, Languages, Shortcut setting, Screen auto lock.

3. Display

In this function, you can set Idle display settings, Contrast, backlight time. Individual values can be changed using the * and # keys.

4. Security

To protect personal privacy, you can set the SIM security, Phone security, Blacklist, etc.

Restore factory settings:

Input the password '1234'

5. Profiles

This mobile phone is provided with several profiles. You can select or customize a profile and activate it. Available options are:

Normal
Silent
Meeting
Indoor
Outdoor

FILE MANAGER

File Manager explores the files in phone and external memory card. In this menu, you can manage the pictures, MP3 files and other folders in this menu.

My music – Audio folder

Photos – Photo folder

Videos – Video folder

ORGANIZER

1. Calendar

Calendar can view date, add event, delete event, etc.

2. Calculator

This function provides the different calculators service including Plus, Minus, Multiplication and Division.

3. Alarm

Alarm can set 3 alarms with repeat, snooze, and alert type.

4. Stopwatch/Timer

You can use your phone for simple stopwatch time record. Press the Call key to start the timer, and then press the Call key to stop timing. It can be reset by number 5 right key after it stops.

5. Bluetooth

You can turn on/off Bluetooth.

Bluetooth: you can power on it, and then search the Bluetooth device, you can pair them to operate between them. You also can setting the Bluetooth with storage, audio path, etc.

MAGNIFIER

Use UP-DOWN Key for magnification.

Warranty and post-warranty service

Repairs and servicing may only be carried out in an authorized service centres for EVOLVEO products (see www.evolveo.com), otherwise you may damage your mobile phone and lose the warranty.



Disposal: The symbol of crossed out container on the product, in the literature or on the wrapping means that in the European Union all the electric and electronic products, batteries and

accumulators must be placed into the separate salvage after finishing their lifetime. Do not throw these products into the unsorted municipal waste



DECLARATION OF CONFORMITY

Hereby, the company Abacus Electric, s.r.o. declares that the EVOLVEO EasyPhone FM is in compliance with the requirements of the standards and regulations, relevant for the given type of device.

Find the complete text of Declaration of
Conformity at <ftp://ftp.evolveo.com/ce>

Dovozce / Dovozca / Importer / Importőr

Abacus Electric, s.r.o.

Planá 2, 370 01, Czech Republic

Výrobce / Výrobca / Manufacturer /
Gyártó

Naxya Limited

No. 5, 17/F, Strand 50, 50 Bonham

Strand, Sheung Wan, Hong Kong

Made in China

Copyright © Abacus Electric, s.r.o.
www.evolveo.com
www.facebook.com/EvolveoCZ

All rights reserved.

Design and specification may be
changed without prior notice.